


DATA SHEET

EL 200 E2 01 | 116527

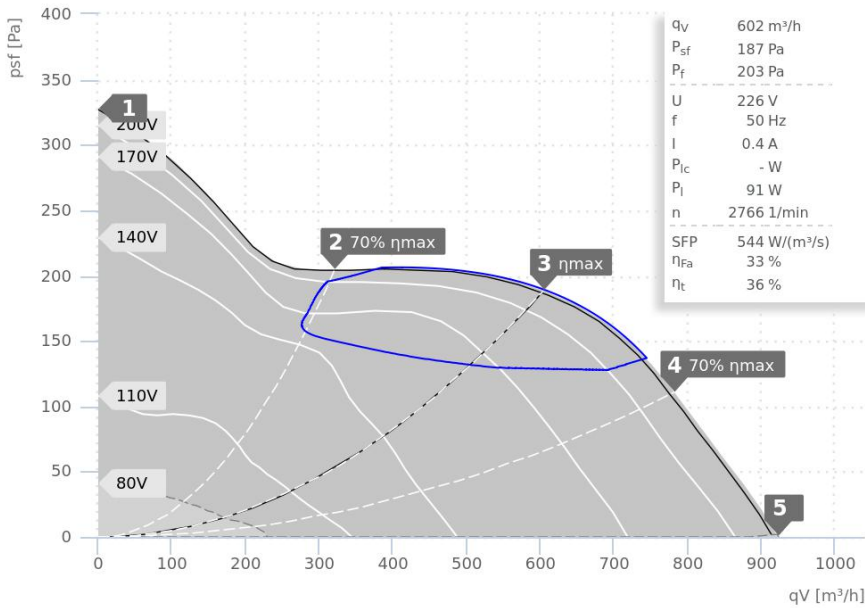

- Diagonal impeller with downstream three-dimensional guide vanes
- With Plastic housing
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,4	0,3	0,4	0,5	0,5
Power consumption P ₁	W	80	77	92	100	103
RPM n	1/min	2845	2875	2779	2742	2720
SWL inlet L _{WA5}	dB(A)	72	72	72	75	76
SWL outlet L _{WA6}	dB(A)	76	75	76	75	78
SWL casing break out L _{WA2}	dB(A)	62	61	60	59	61

Sound power (L _w) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	72	33	46	58	64	69	66	61	52
Outlet	L _{WA6}	75	36	47	58	65	73	70	63	55
Casing	L _{WA2}	60	36	35	48	49	54	56	49	45

EL 200 E2 01 116527	
Voltage U _N	230 V 1~
Current I _{max}	0,5 A
Ambient temperature t _A	45 °C
Medium temperatures t _M	45 °C
Speed Control	V
Motor protection	TMI
Insulation class motor	F
Weight	2,9 kg
Poles	2
IP motor	IP00
IP terminal box	-
Min. operating temperature	-25 °C

