

MPS 250 EC 30


143072

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- High efficiency EC motor outside the air flow
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	492	m³/h
Pressure	0	Pa

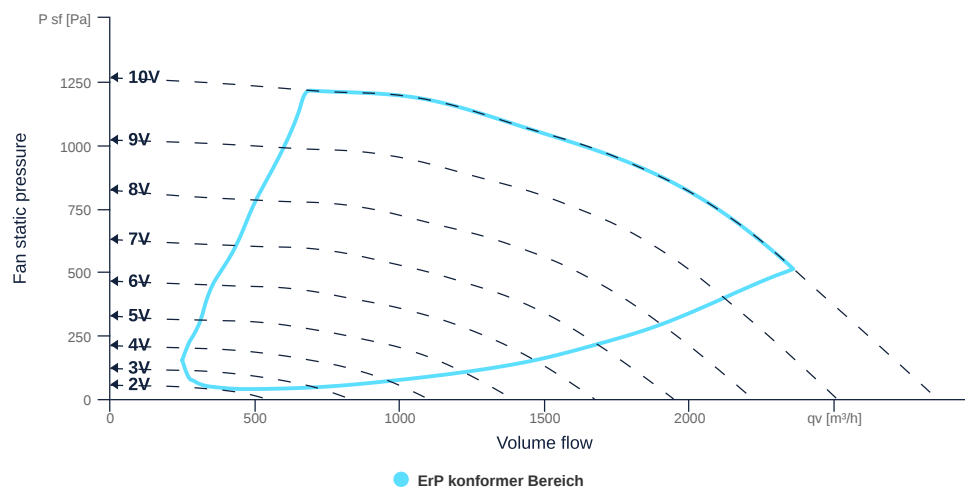

to the product detail page

MPS 250 EC 30

143072

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	35.5	kg	m
Nominal air flow rate, nominal point m³/h	1796.4	m³/h	q _{v,nom}
Nominal external pressure, static	900.7	Pa	p _{s,nom}
Fan type	Radial		F _{antype}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.5	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.87	kW	P _{e,nom}
Face velocity, nominal point	10.2	m/s	v _{nom}
Nominal external pressure, static	900.7	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	63.2	%	η _{es,SUP}
Highest external air leakage rate	0.19	%	
Enclosure sound level, nominal point	80	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	894	894	W	P _{ed, max}
Max. operating current (device)	4.15	4.15	A	I _{ed, max}
Max. speed	3650	3650	1/min	n _{max}
Max. stat. efficiency	50.6	50.6	%	η _{es}
Max. fan efficiency	54.4	54.4	%	η _e
Max. flowrate	2850	2850	m³/h	q _{v, max}
Max. stat pressure	1260	1260	Pa	p _{sf, max}
Max. medium temperature	120	120	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-20	-20	°C	T _{amb, min}



to the product detail page

MPS 250 EC 30


143072



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrSUPmotor
Rated voltage	230		V	Urated, f1
Rated current	4.4		A	Irated, f1
Shaft power	750		W	Pout, f1
Speed	3000		1/min	nf1
UL-Certification motor		UL recognized		ULcert


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

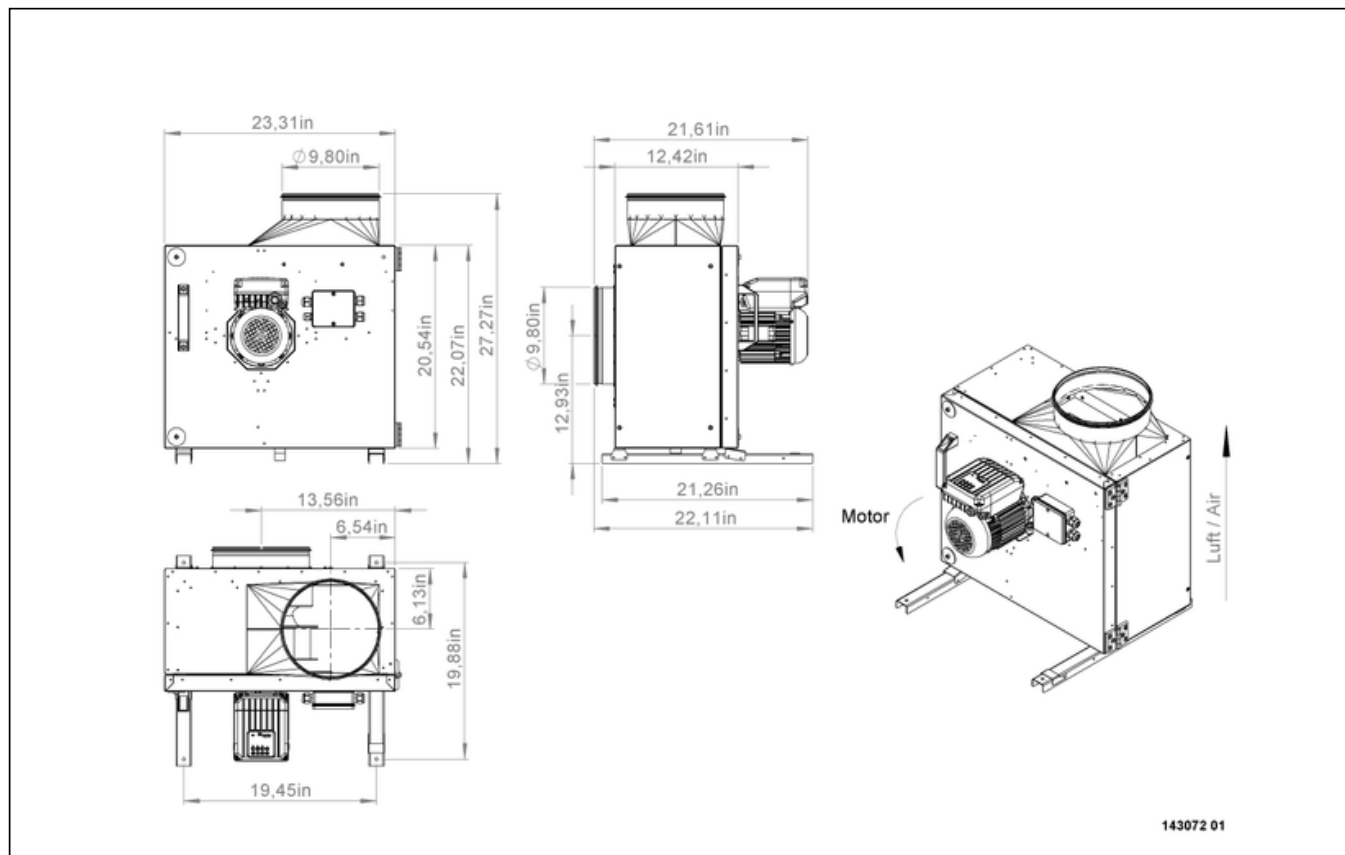

MPS 250 EC 30

143072


ruck

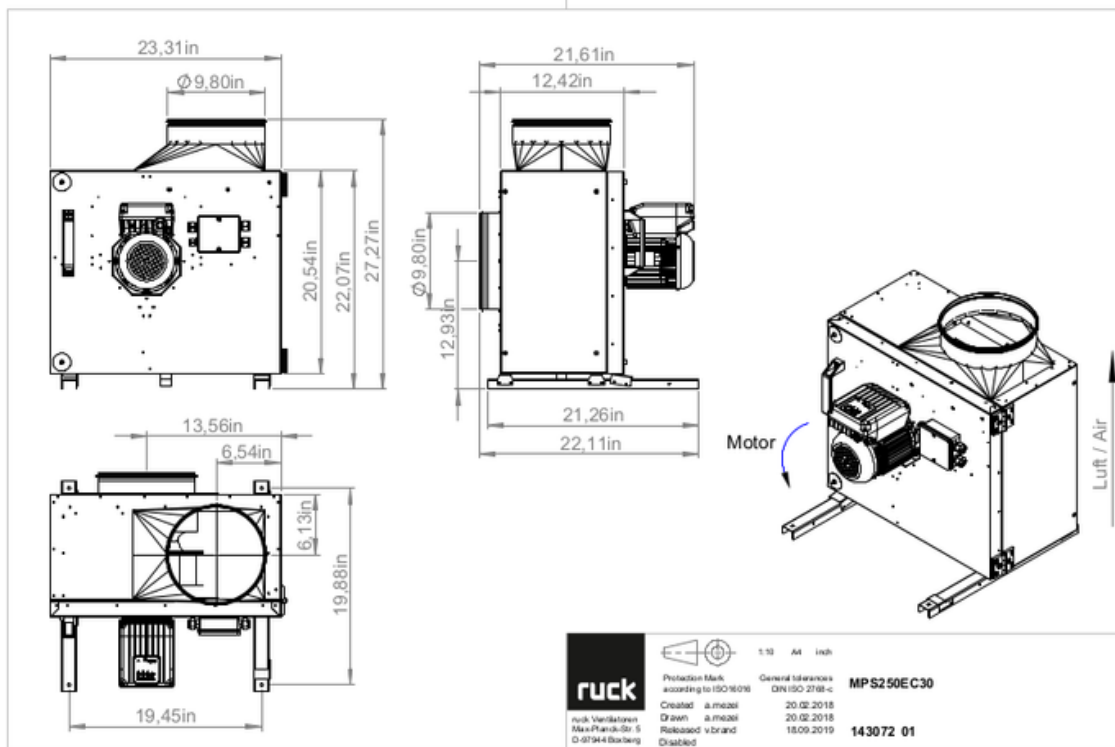

MPS 250 EC 30

143072

ruck

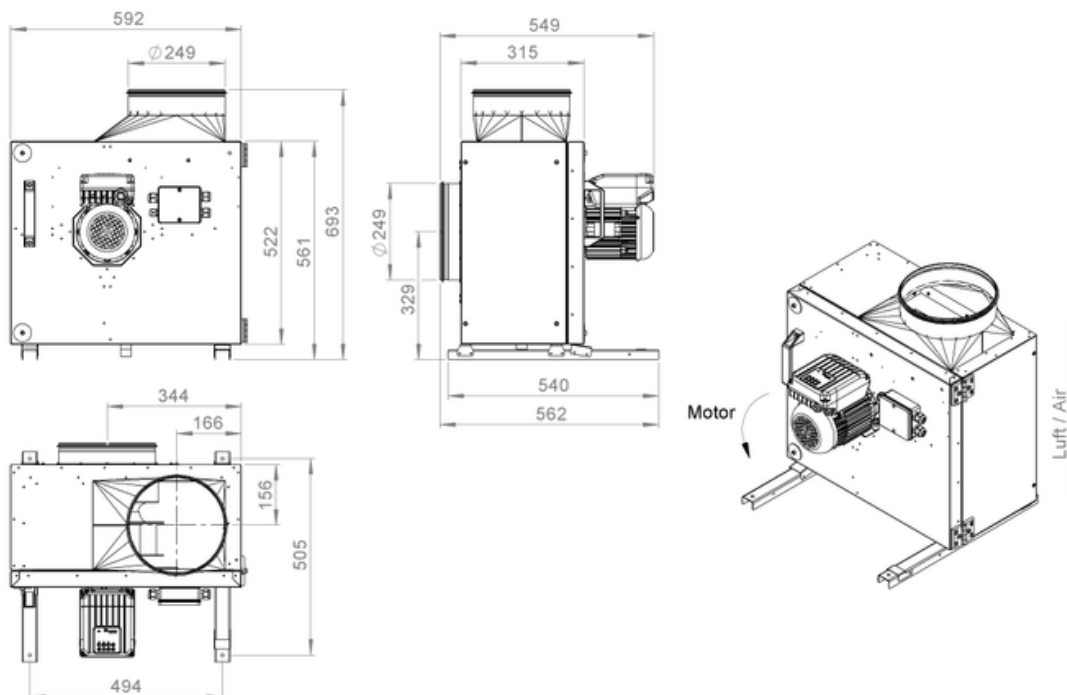

143072 01





to the product detail page

MPS 250 EC 30

143072

ruck

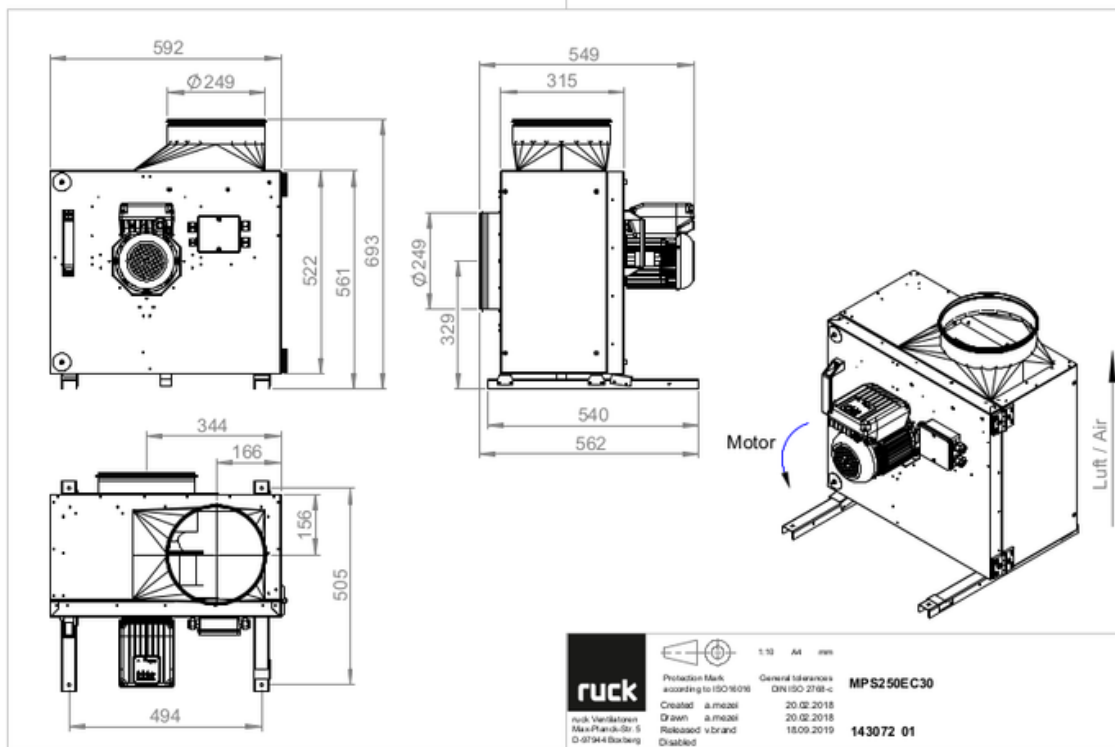

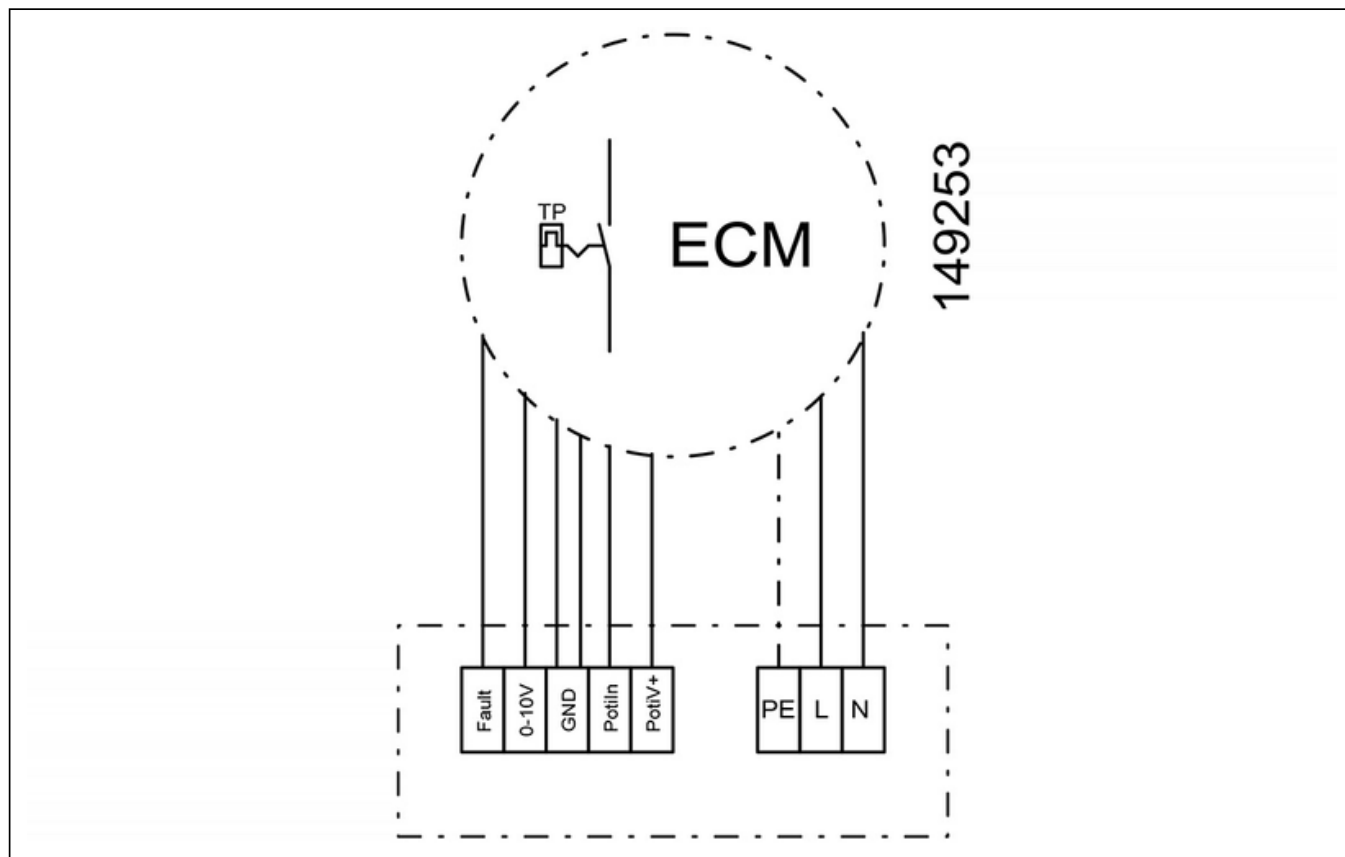

MECHANICAL ACCESSORIES

RSK 250D | 113488



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

WK MPS 07 | 127953



- Wall mounting bracket for box fan
- Galvanized steel sheet
- 1 Pack = 2 pieces

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

WSH MPS EC 01 | 136117



- Weather protection hood for motor
- Galvanized steel sheet

RSK 250 | 102686



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC} - 2,5\text{A}/12\text{V DC}$
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50 \text{ }^\circ\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

SEN P1000 | 126080



- Differential pressure sensor
- P-control, PV-control
- P = 2 pcs. required, PV = 1 pcs. required

MTP 50 | 153133



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\% / 50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC} / 2-20 \text{ mA} / 10-100\% \text{ PWM}$
- Min. and max. output value adjustable

