

Project : Customer : Project Code :
Quotation : Date : 15 November 2024

MaXfan2
56-1 MaXfan2/20/4/6//
Lead time may vary based on stock availability at time of order. Please refresh the lead time in the project or reselect the fan before placing an order.

Table with 2 columns: Product details and specifications. Rows include Model Code, Fan Diameter, Impeller, Installation, and Fan Casing.

Table with 2 columns: Performance [2 STAGES] and values. Rows include Requested Duty, Actual Duty, Outlet Dynamic Pressure, and Velocity.

Table with 2 columns: Motor [PER STAGE] and specifications. Rows include Motor Rating, Full Load Current, Starting Current, Electrical Supply, Motor Winding, and Motor Type.

Table with 2 columns: Efficiency Grades and ErP [FMEG] Rating.


Table with 2 columns: Environment and specifications. Rows include Air Density, Smoke Venting, and Operating Environment.

PRODUCT DIMENSIONS
This drawing shows dimensions that should be used as a guide only and are subject to change. Certified drawings are available on request.

Table with 2 columns: Mechanical details and specifications. Rows include Casing, Impeller, Operating Temperatures, and Weight.

COMMENTS

FAN PERFORMANCE CURVE

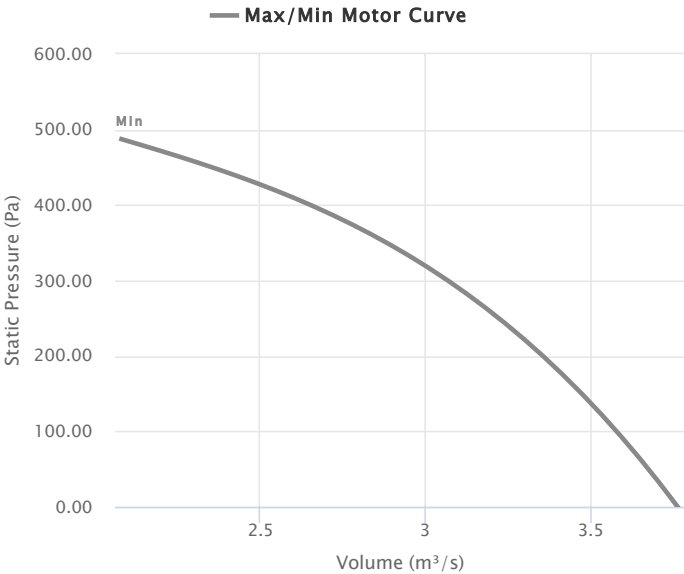

ACOUSTICS

Table with 3 main sections: Sound Spectrum (Hz), Overall, and Distance (3 m). Rows include frequency bands (125, 250, 500, 1k, 2k, 4k, 8k), Lw\*, LWA\*, and LpA @ 3 m \*\*.

FAN & ACCESSORIES


Table with 3 columns: Item Description, Part Number, and Qty. Row includes 56-1 MaXfan2/20/4/6//, EQ571460, and 1.

Project :  
Quotation :


Customer :

Project Code :  
Date : 15 November 2024


AERODYNAMIC

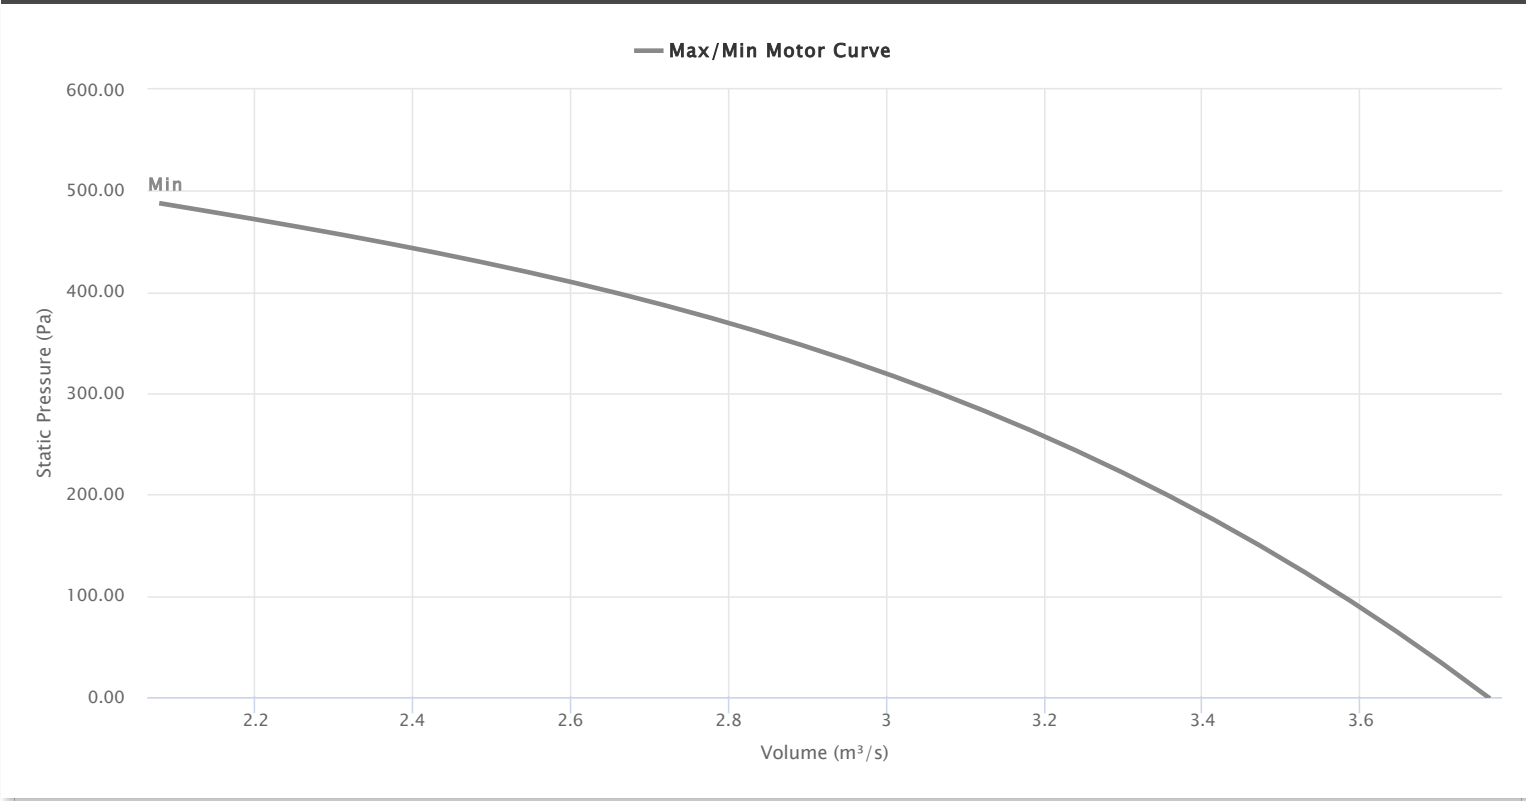

POWER CHART

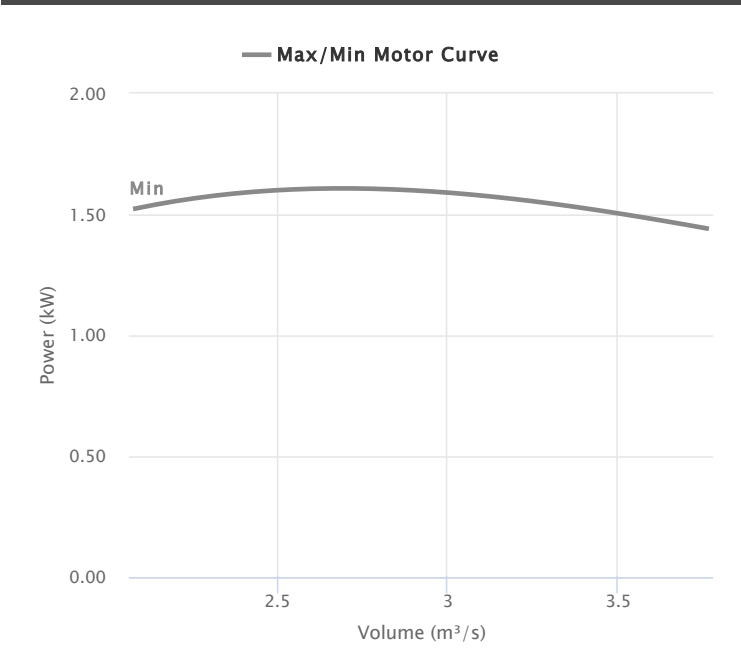

EFFICIENCY CHART

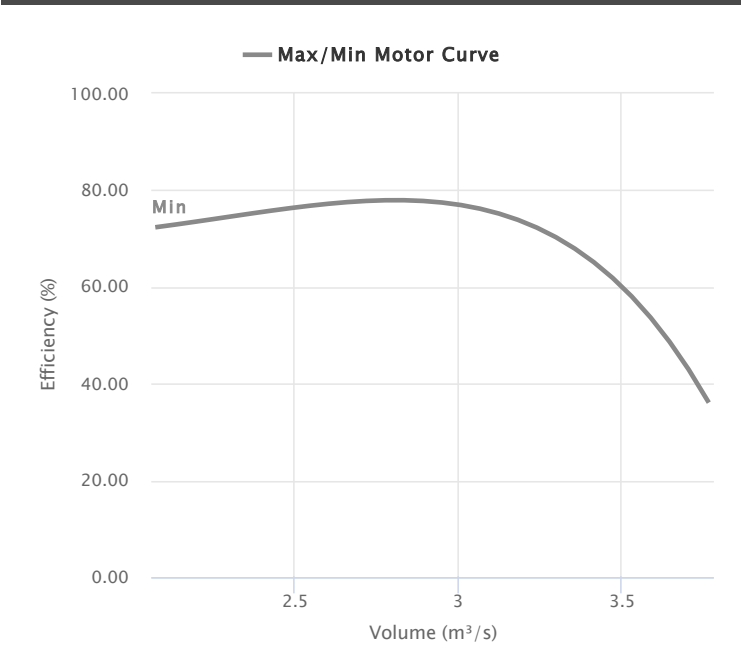

ACOUSTICS

Sound Spectrum (Hz)								Overall
125	250	500	1k	2k	4k	8k	Lw*	LpA @ 3 m **
Sound Data At Requested Duty .			* Lw dB re 10 <sup>-12</sup> W		** dBA re 2x10 <sup>-5</sup> Pa			

Project :	Customer :	Project Code :
Quotation :		Date : 15 November 2024

PRODUCT DIMENSIONS

□

ACCESSORY DIMENSIONS

Project :	Customer :	Project Code :
Quotation :		Date : 15 November 2024

MAXFAN

PERFORMANCE NOTES

Performance data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with ISO 5801 and is specifically applicable for Ducted installations. When an electronic controller is incorporated, motor noise may increase slightly - particularly when the operating speed is well below maximum. We therefore recommend using an auto transformer speed controller for noise sensitive applications. Bifurcated Axial fans are ErP exempt, where the in-duct air temperature is continuously greater than 100°C. This fan variant should not be used within EEA countries at lower temperatures

ACOUSTIC NOTES

Performance data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with ISO 5801 and is specifically applicable for Ducted installations. When an electronic controller is incorporated, motor noise may increase slightly - particularly when the operating speed is well below maximum. We therefore recommend using an auto transformer speed controller for noise sensitive applications. Bifurcated Axial fans are ErP exempt, where the in-duct air temperature is continuously greater than 100°C. This fan variant should not be used within EEA countries at lower temperatures.