

Technical Data Sheet

CODE 61701

NORDIK INTERNATIONAL PLUS 90/36



Ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,32	Airflow speed at max speed (m/s)	2,59
Absorbed Power max (W)	70	Delivery max (m ³ /h)	8550
Blades diameter	90	Delivery max (m ³ /min)	142,50
Frequency (Hz)	50	giri_minuto	228
Insulation Class	I°	RPM	228
Voltage (V)	220-240	Service value (m ³ /min)/W	2,036
Weight (Kg)	5,5	Sound power level Lw [dB(A)]	46,1

DIMENSIONS

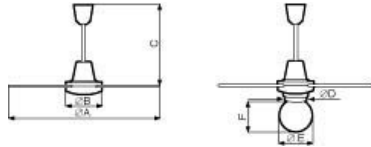

Etichetta Energetica	N0
Size A (mm)	∅
	914
Size B (mm)	∅ 230
Size C (mm)	495
Size D (mm)	∅ 130
Size E (mm)	∅
	200
Size F (mm)	180
Size G (mm)	776

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61701

NORDIK INTERNATIONAL PLUS 90/36



Ceiling fans

DESCRIPTION

- Nominal diameter of blades 900 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow: 8,550 m³/h.
- 3 sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept Light Kit (optional), suitable for lamp rated 150W max with E27 screw fitting, or equivalent energy-saving lamp with E27 screw fitting.
- Speed selectable by way of control units (optional)

ACCESSORIES



TELENORDIK 5T
Code 22387



**PLUS LIGHT KIT
(KIT LUCE)**
Code 22415



**SCNR5 UNIF.X
NK SOFFITTO**
Code 12955



**SCNRL5 UNIF. X
NK SOFFITTO**
Code 12957

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com