


# Bend – lockseamed

# BFU, BF15°




## Dimensions



$$r_m = 1 \cdot d_1$$

## Description

Segmented and lockseamed bend.

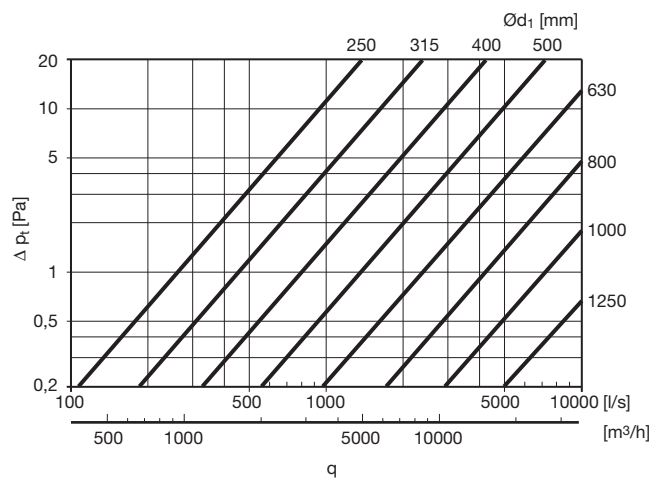

BFU- Eurovent certified Lindab Safe fitting with gasket.  
 BF- Lindab Vent fitting without gasket.

| $\text{Ø}d_1$<br>nom | l<br>mm | m<br>kg |
|----------------------|---------|---------|
| 250                  | 33      | 0,65    |
| 280                  | 37      | 0,77    |
| 300                  | 39      | 0,85    |
| 315                  | 41      | 0,91    |
| 355                  | 47      | 1,41    |
| 400                  | 53      | 1,70    |
| 450                  | 59      | 2,20    |
| 500                  | 66      | 2,65    |
| 560                  | 74      | 3,30    |
| 600                  | 79      | 3,70    |
| 630                  | 83      | 4,00    |
| 710                  | 93      | 5,80    |
| 800                  | 105     | 7,00    |
| 900                  | 118     | 8,50    |
| 1000                 | 132     | 10,4    |
| 1120                 | 147     | 12,5    |
| 1250                 | 165     | 14,5    |

## Ordering example

