



# CAB

5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS



Centrifugal fan cabinet with manufactured from galvanised sheet steel, acoustic and fire retardant lining 50 mm thick. Forward curved centrifugal fan with closed single-phase motor and speed controllable. IP44, B Brand S&P model CAB-150 (230V 50/60) R8.

## Theoretical Working Point

Airflow	-
Static Pressure	0,000 Pa
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m <sup>3</sup>
Frequency	50 Hz


## Construction

Discharge diameter	150 mm
Fan size	140/059
Weight	18,00 kg

## Motor Characteristics

Number of poles	2
Voltage	1-230V-50Hz
Maximum absorbed current	0,4 A
IP Rating	IP44
Motor insulation class	B


## Drawing

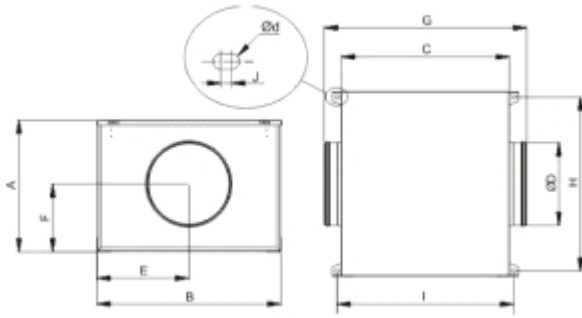

A	B	C	D	E	F	G	H	I
273	388	395	150	143	162	505	355	424

J	Ød
6.5	4.5

## Performance Chart

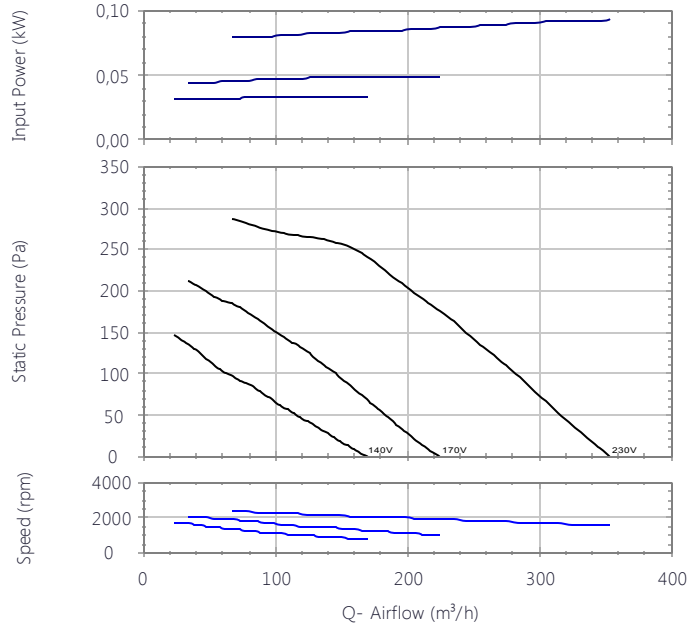


## Sound Performance

	63	125	250	500	1k	2k	4k	8k	Overall
<b>Inlet (LwA)</b>	46	53	45	45	44	41	41	37	56
<b>Inlet LpA @ 1m</b>	35	42	34	34	33	30	30	26	45
<b>Outlet (LwA)</b>	40	56	56	59	65	63	59	57	69
<b>Outlet LpA @ 1m</b>	29	45	45	48	54	52	48	46	58
<b>Breakout (LwA)</b>	46	49	40	40	41	34	31	28	52
<b>Breakout LpA @ 1m</b>	35	38	29	29	30	23	20	17	41





### Performance Chart

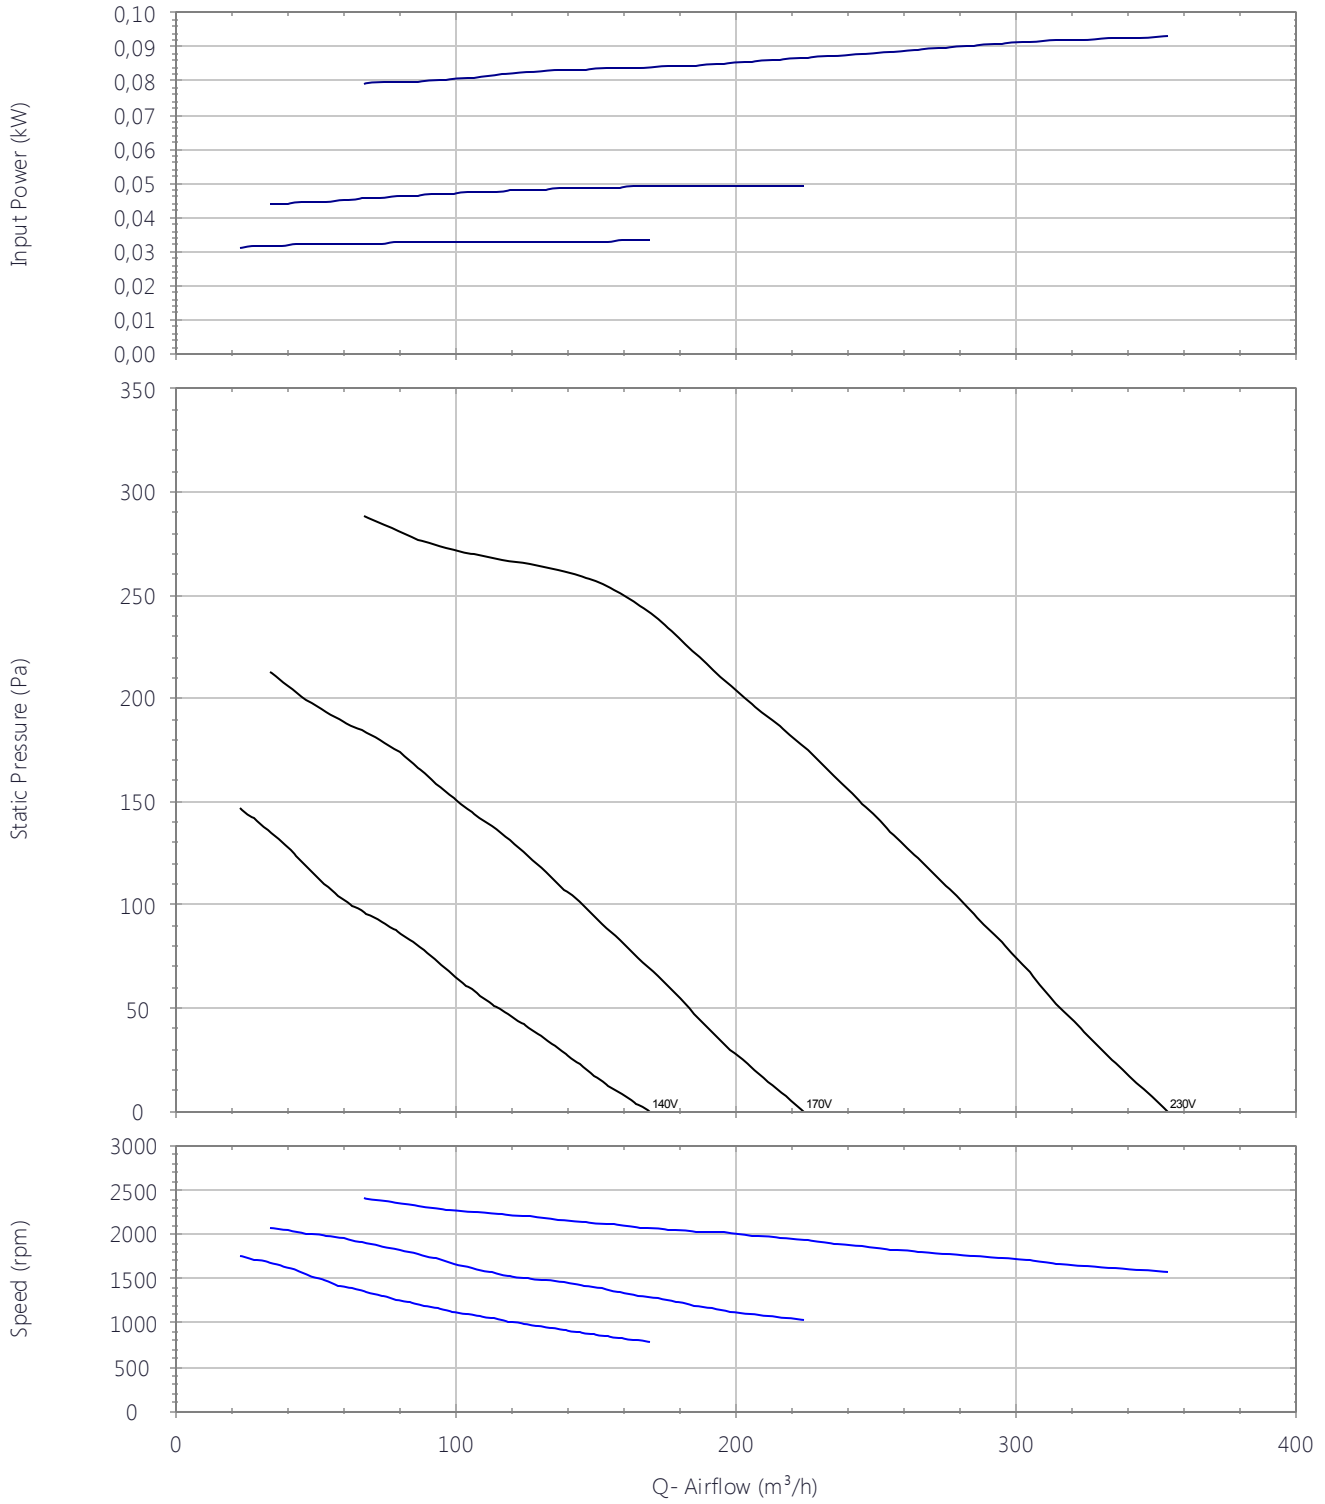




### Sound Performance

	63	125	250	500	1k	2k	4k	8k	Overall
<b>Inlet (LwA)</b>	46	53	45	45	44	41	41	37	56
<b>Inlet LpA @ 1m</b>	35	42	34	34	33	30	30	26	45
<b>Outlet (LwA)</b>	40	56	56	59	65	63	59	57	69
<b>Outlet LpA @ 1m</b>	29	45	45	48	54	52	48	46	58
<b>Breakout (LwA)</b>	46	49	40	40	41	34	31	28	52
<b>Breakout LpA @ 1m</b>	35	38	29	29	30	23	20	17	41



Drawing

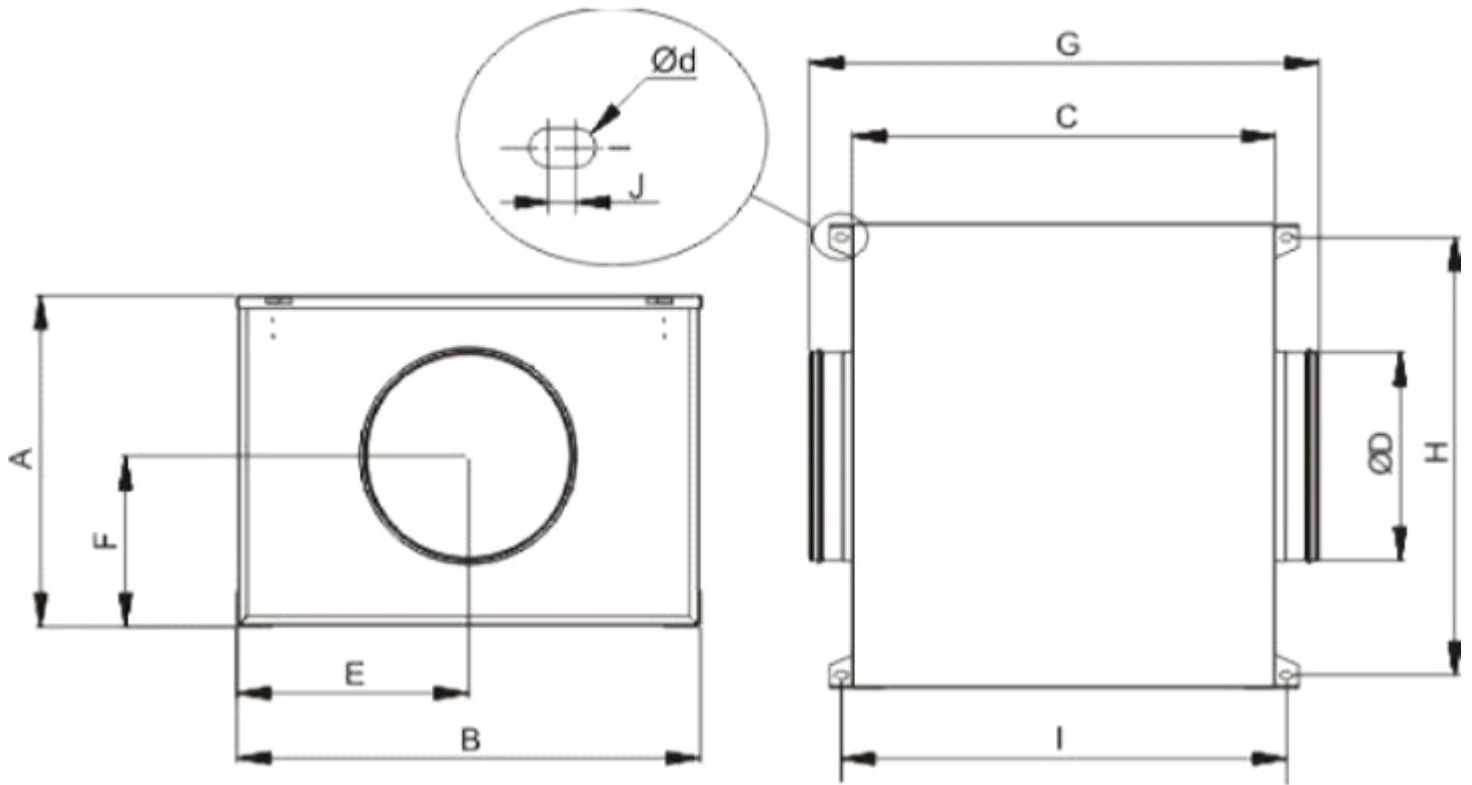

A	B	C	D	E	F	G	H	I	J	Ød
273	388	395	150	143	162	505	355	424	6.5	4.5


## Accessories

### L011100000081 - REB-1 230V 50/60 ELECTRONIC SPEED CONTROLLER

Electronic single phase speed controller, 3-wire control, surface mounted, fuse protected with separate on/off switch.



#### Dimensions




A	B	C
105	83	40

### 5401620900 - CONTROL ECOWATT AC/4A (230VAC 50HZ)



Control element for demand controlled ventilation systems in public, commercial residential building it automatically modifies the fan speed to adapt it to the needs defined in the system, measured with sensors. It has three basic modes of operation: 1. Integral proportional control at constant pressure. 2. Proportional control with maximum demand criteria with multiple sensor input: temperature, CO2 and relative humidity. 3. Minimum-maximum control with three-sensor input: CO2, temperature, relative humidity or presence detectors (PIR). DC signal output of 1 to 10 V or signal output for AC voltage variation for single phase motors at 230 V. ECOWATT C CONTROL: for single phase ventilation units. ECOWATT C CONTROL: for DC ventilation units. Power supply:- AC model: 1~230 V. - DC model: 1~230 V or 24 VDC..

#### Dimensions




B	H	T
165	220	110

### 5401306500 - COM-3

Three-speed switch.Fan ON/OFF and speed selector.Maximum current rating 4A.



#### Dimensions



A	B	C
90	90	75



**CAB**


5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS

5401270300 - REB-1 N (230V 50)



Electronic speed controller

**Dimensions**




A	B	C
80	22	46

5401271100 - REB-1 N E (230V 50)



Electronic speed controller

5401643000 - CONTROL ETT-6




Electronic step controller. Can control activation of up to six devices. Can be used to switch on and off heating systems (EC wall-mounted fan heaters or TERMOTECH radiant panels) or for ventilations systems with several units.

5401245500 - RMB-1,5 (220V 50Y60)



AUTOTRANSFORMER SPEED CONTROLLER

Dimensions




A	B	C
230	180	95

5401640600 - INTER 4P

Three speed switch.Fan ON/OFF and speed selector.Maximum current rating 4A.



Dimensions




A	B	C
86	86	60.4

5416589900 - MFL-150 G4

MFL filtration boxes are of G4 grade filtration and are designed for direct connection with standard circular ducting. The MFL-G4 filtration boxes are supplied with a cover easily removable to replace the filter.



Dimensions



A	B	D	E	F
206	229	150	154	218



# CAB

5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS


5211816600 - SIL-150

Silencer to be installed either at the inlet or outlet of the fan.



Corrections							
63	125	250	500	1k	2k	4k	8k
-2	-4	-8	-16	-26	-26	-23	-10

## Dimensions




A	B	C	D
150	250	600	780

5209161900 - EC 22 N BLANCO RAL 9016

Self-regulating air vents, manufactured in white or brown polystyrene. Guaranteeing air renewal in a home through the main rooms (Living room, sitting room and bedrooms). Enabling an airflow of 22, 30 and 45 m<sup>3</sup>/h. Fitted either to carpentry elements (in openings measuring 354x12 mm) or connected to a wall feedthrough tube. The EC N air vent can have a cover that includes an insect grille, available in white or brown.



## Dimensions




A	B	C	H	L	W
20	305	18	20	295	8

5209162000 - EC 30 N BLANCO RAL 9016

Self-regulating air vents, manufactured in white or brown polystyrene. Guaranteeing air renewal in a home through the main rooms (Living room, sitting room and bedrooms). Enabling an airflow of 22, 30 and 45 m<sup>3</sup>/h. Fitted either to carpentry elements (in openings measuring 354x12 mm) or connected to a wall feedthrough tube. The EC N air vent can have a cover that includes an insect grille, available in white or brown.



## Dimensions



A	B	C	H	L	W
20	305	18	20	295	8



## 5209162100 - EC 45 N BLANCO RAL 9016

Self-regulating air vents, manufactured in white or brown polystyrene. Guaranteeing air renewal in a home through the main rooms (Living room, sitting room and bedrooms). Enabling an airflow of 22, 30 and 45 m<sup>3</sup>/h. Fitted either to carpentry elements (in openings measuring 354x12 mm) or connected to a wall feedthrough tube. The EC N air vent can have a cover that includes an insect grille, available in white or brown.



### Dimensions



A	B	C	H	L	W
24	390	20	23	400	12

## 5209163400 - ECA 22 BLANCO RAL9016

Self-regulating air vents, manufactured from injection moulded polystyrene and available in three air volume range (22, 30, 36 and 45 m<sup>3</sup>/h). Fitted in openings measuring 354x12 mm. Suitable for installation on window joinery by crews. The air inlet acoustic element is placed on the indoor side while the cover is fitted on the external side of the joinery. An additional acoustic element can be slot into the air inlet (ECA+RA).



### Dimensions



A	B	C	H	L	W
45	422	45	23	400	12

## 5209162500 - ECA 22 RA BLANCO RAL 9016

Self-regulating air vents, manufactured from injection moulded polystyrene. They allow air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22, 30, 36 and 45 m<sup>3</sup>/h. It can be installed on carpentry elements or joined to a wall bypass sleeve.



### Dimensions



A	B	C	H	L	W
69	422	45	23	400	12

## 5209163700 - ECA 30 BLANCO RAL9016

Self-regulating air vents, manufactured from injection moulded polystyrene and available in three air volume range (22, 30, 36 and 45 m<sup>3</sup>/h). Fitted in openings measuring 354x12 mm. Suitable for installation on window joinery by crews. The air inlet acoustic element is placed on the indoor side while the cover is fitted on the external side of the joinery. An additional acoustic element can be slot into the air inlet (ECA+RA).




### Dimensions



A	B	C	H	L	W
45	422	45	23	400	12

## 5209162600 - ECA 30 RA BLANCO RAL 9016

Self-regulating air vents, manufactured from injection moulded polystyrene. They allow air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22, 30, 36 and 45 m<sup>3</sup>/h. It can be installed on carpentry elements or joined to a wall bypass sleeve.



### Dimensions



A	B	C	H	L	W
69	422	45	23	400	12

## 5209172100 - ECA 36 BLANCO RAL9016

Self-regulating air vents, manufactured from injection moulded polystyrene and available in three air volume range (22, 30, 36 and 45 m<sup>3</sup>/h). Fitted in openings measuring 354x12 mm. Suitable for installation on window joinery by crews. The air inlet acoustic element is placed on the indoor side while the cover is fitted on the external side of the joinery. An additional acoustic element can be slot into the air inlet (ECA+RA).




### Dimensions



A	B	C	H	L	W
45	422	45	23	400	12

## 5209172200 - ECA 36 RA BLANCO RAL 9016



Self-regulating air vents, manufactured from injection moulded polystyrene. They allow air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22,30, 36 and 45 m<sup>3</sup>/h. It can be installed on carpentry elements or joined to a wall bypass sleeve.

### Dimensions



A	B	C	H	L	W
69	422	45	23	400	12

## 5209164000 - ECA 45 BLANCO RAL9016



Self-regulating air vents, manufactured from injection moulded polystyrene and available in three air volume range (22, 30, 36 and 45 m<sup>3</sup>/h). Fitted in openings measuring 354x12 mm. Suitable for installation on window joinery by crews. The air inlet acoustic element is placed on the indoor side while the cover is fitted on the external side of the joinery. An additional acoustic element can be slot into the air inlet (ECA+RA).

### Dimensions



A	B	C	H	L	W
45	422	45	23	400	12

## 5209162700 - ECA 45 RA BLANCO RAL 9016



Self-regulating air vents, manufactured from injection moulded polystyrene. They allow air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22,30, 36 and 45 m<sup>3</sup>/h. It can be installed on carpentry elements or joined to a wall bypass sleeve.

### Dimensions




A	B	C	H	L	W
69	422	45	23	400	12

## 5209172400 - ECA HY 6/45 BLANCO RAL 9016



Humidity adjustable acoustic air vents for renewing air in the main rooms of flats and detached homes. They guarantee a variable flow of 6 to 45 m<sup>3</sup>/h according to the degree of humidity in the room, for a pressure difference of 20 Pa. It can be installed on carpentry elements or joined to a wall bypass sleeve.

### Dimensions

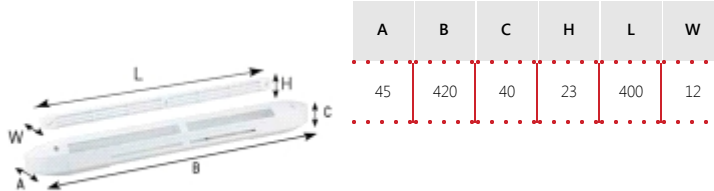


## 5209172500 - ECA HY 6/45 RA BLANCO RAL 9016



Humidity adjustable air vents with an acoustic frame for renewing air in the main rooms of flats and detached homes. The acoustic frame offers great noise attenuation. They guarantee a variable flow of 6 to 45 m<sup>3</sup>/h according to the degree of humidity in the room, for a pressure difference of 20 Pa. It can be installed on carpentry elements or joined to a wall bypass sleeve.

### Dimensions

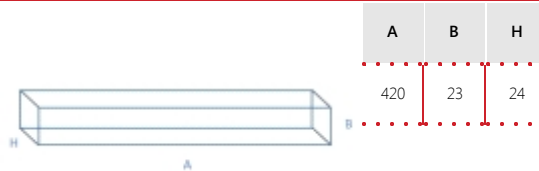


## 5209172300 - EC HY 6/45 BLANCO RAL 9016



Humidity adjustable air vents for renewing air in the main rooms of flats and detached homes. They guarantee a variable flow of 6 to 45 m<sup>3</sup>/h according to the degree of humidity in the room, for a pressure difference of 20 Pa. It can be installed on carpentry elements or joined to a wall bypass sleeve.

### Dimensions

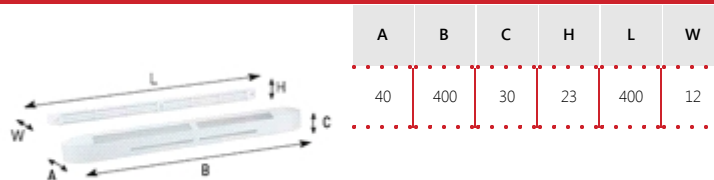


## 5209195800 - SILEM KIT 22



Humidity adjustable air vents with sound attenuator. SILEM KIT HY allows air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22 and 30 m<sup>3</sup>/h. They are fitted into the wall. With this purpose, it is included a sheet metal sleeve (Ø 125 mm and 300 mm length) and external facade grille.

### Dimensions

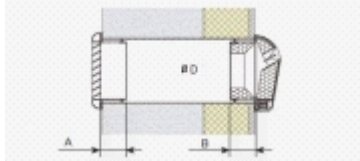


A	B	D
46	48	125

## 5209195900 - SILEM KIT 30



Humidity adjustable air vents with sound attenuator. SILEM KIT HY allows air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22 and 30 m<sup>3</sup>/h. They are fitted into the wall. With this purpose, it is included a sheet metal sleeve (Ø 125 mm and 300 mm length) and external facade grille.

### Dimensions

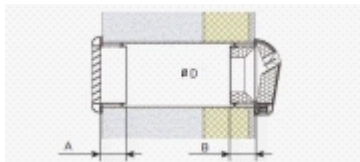


A	B	D
46	48	125

## 5209196100 - SILEM KIT HY 125



Humidity adjustable air vents with sound attenuator. SILEM KIT HY allows air renewal in a house via main rooms (living room, dining room, bathroom). Airflow of 22 and 30 m<sup>3</sup>/h. They are fitted into the wall. With this purpose, it is included a sheet metal sleeve (Ø 125 mm and 300 mm length) and external facade grille.

### Dimensions

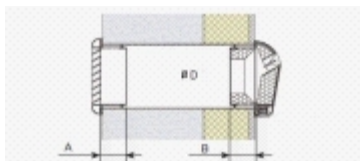

A	B	D
46	48	125



# CAB

5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS

## 5416354800 - PULSER M



Single phase electric heater controller. Supplementary unit for slave control from another PULSER to control electric heaters with power ratings high to the PULSER capacity (3600W-230V).

### Dimensions



A	B	C
83	153	40

## 5416365400 - PULSER-ADD



Single phase electric heater controller. Set point: 0-30°C, the sensor determines the scale range (for use with NTC-sensor). Output (load): 16 A (min. 1 A). Protection class: IP30. Input regulation maximum and minimum. Maximum absorbed power: 3.6 kW.

### Dimensions




A	B	C
83	153	40

## 5138920300 - ACOPEL F400-160/160 N

FLEXIBLE CONNECTOR



### Dimensions



A	B
163	160



**CAB**

5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS

5145825500 - ACOP-VENT-150 (V977503)




FLEXIBLE CONNECTOR

854001C09 - BEHC 10-40/90

Hydroreglable and timed extraction valves. System updated by the RT 2012, installation on horizontal or vertical walls, removable central grid for ease of maintenance, battery operated control: wireless installation. Kitchen and WC: manual, electric or ba



**Dimensions**

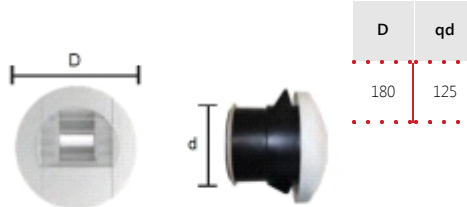


L011100000276 - OVER RUN TIMER

Remote (wired) run-on timer, adjustable run-on time 30 seconds to 25 minutes.



**Dimensions**

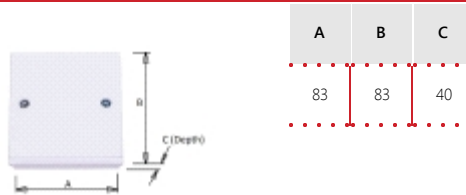

## L0111000000388 - 7-DAY PROGRAMMABLE TIMECLOCK



Surface-mount digital 7-day timer.

### Dimensions




A	B	C
66	98	39

## L0111000000414 - CONTACTOR INTERFACE STATION -9A-2 x N/C AND 2 x N/O CONTACTS



9A 2 x N/O / 2 x N/C relay in IP65 enclosure for switching of fans from an external source.

### Dimensions




A	B	C
110	234	149

## L0111000000199 - CONTACTOR INTERFACE STATION - 9A - 4 x N/O CONTACTS



9A N/O relay in IP65 enclosure for switching of fans from an external source, particularly useful for the on/off control of 3-phase units.

### Dimensions



A	B	C
110	234	149





**CAB**

5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS




L0111000000541 - RELAY 230V COIL DPDT C/W ENCLOSURE IP65

Double-Pole, Double-throw relay in IP65 enclosure for switching of fans from an external source.



**Dimensions**




A	B	C
110	234	149

L0111000000275 - PIR SENSOR

PIR SENSOR with Volt-Free contacts and adjustable timer.



**Dimensions**




A	B	C
83	83	55

L0111000000389 - THERMOSTAT 230V INPUT

Thermostat for switching of fans by temperature, adjustable temperature range 10-30 degrees C.



**Dimensions**



A	B	C
83	83	40



**CAB**


5113862400 - CAB-150 (230V 50/60) R8 - ACOUSTIC CABINET FANS

L0111000000390 - THERMOSTAT 24V INPUT



Thermostat for switching of fans by temperature, adjustable temperature range 10-30 degrees C.

**Dimensions**




A	B	C
83	83	40

L0111000000589 - CO2 SENSOR WITH VFC (MAX 3A AT 250V) 230V



CO2 Sensor for switching of fans by Carbon Dioxide, adjustable switching points: 800ppm, 1000ppm, 1200ppm, 1400ppm.

**Dimensions**



A	B	C
85	130	38.5



## ErP Data

Ecodesign	
Commission regulation (EU) N°1253/2014 of July 2014	
Information requirements (Annex V)	
Product Name	CAB-150 (230V 50/60) R8
Identifier	5113862400
SEC average climate (kWh/(m <sup>2</sup> .an))	-24,69
SEC class	C
SEC cold climate (kWh/(m <sup>2</sup> .an))	-52
SEC warm climate (kWh/(m <sup>2</sup> .an))	-9
Typology	RVU unidirectional
Type of drive	Variable speed drive
Type of HRC	None
Thermal efficiency (%)	0
Maximum flow rate (m <sup>3</sup> /h)	282
Electrical power input at maximum flow rate (W)	90,35
Sound power level (LWA)	42
Reference flow rate (m <sup>3</sup> /s)	0,0553
Reference pressure difference (Pa)	50
SPI (W/m <sup>3</sup> /h)	0,2731
Control factor	0,65
Control typology	Local demand
Maximum internal leakage for BVU (%)	Not applicable
Maximum external leakage for BVU and UVU (%)	5
Mixing rate for BVU without duct connection (%)	Not applicable
Position of visual filter warning	Not applicable
description of visual filter warning	Not applicable
Instructions to install supply grilles	F&W Leaflet
Instructions to install exhaust grilles	F&W Leaflet
<a href="https://www.solerpalau.com/">https://www.solerpalau.com/</a>	
Airflow sensitivity to pressure variation	Not applicable
Indoor/outdoor air tightness (m <sup>3</sup> /h)	Not applicable
Annual electricity consumption - Average climate (kWh/a)	144,53
Annual electricity consumption - Warm climate (kWh/a)	144,53
Annual electricity consumption - Cold climate (kWh/a)	144,53
Annual heating saved - Average climate (kWh/a)	2830
Annual heating saved - Warm climate (kWh/a)	1279,69
Annual heating saved - Cold climate (kWh/a)	5536,23