



Low profile acoustic cabinet fans, manufactured from galvanised sheet steel and internally lined with 50mm thickness of fireproof acoustic fiberglass insulation (M0), with sound-absorbent insulation at the inlet. All models incorporate inlet and discharge circular duct connection flanges with integrated rubber air seal. Direct drive backward curved centrifugal fan. Brushless EC motor, IP44, with thermal overload protection, suitable for single phase supply 230V +/- 15%-50/60Hz. Fan supply with external ON-OFF electrical isolation switch, and potentiometer to adjust the fan speed. Also possible to control the fan speed with external potentiometer type REB-ECOWATT or analogue input signal 0-10V. All cabinets can be installed outdoors as standard with ambient air temperatures between -20°C up to +40°C and suitable for mounting in any orientation.



ON-OFF electrical isolation switch and potentiometer to adjust the fan speed from 10 to 100%.




Low noise level
 Acoustic insulation of 50 mm thickness fireproof fibreglass (M0) with a high resistance coating reducing the noise level significantly.



Sound-absorbent insulation at the inlet.



Direct drive backward centrifugal impeller
 The impeller is factory matched to the EC external rotor motor.

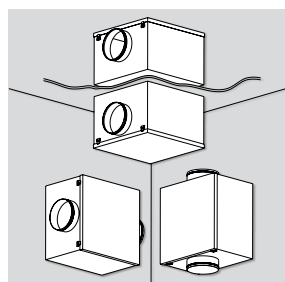

Installation in any orientation
 Possibility to be installed upright, horizontal or inverted.


TECHNICAL CHARACTERISTICS

Before installation check that the product electrical characteristics listed on the data plate label (voltage, power, frequency, etc.) match those of the intended electrical supply.

Model	Input signal voltage (V)	Speed (rpm)	Maximum absorbed power (W)	Maximum absorbed current (A)	Maximum airflow (m³/h)	Sound pressure level * (dB(A)) to 1,5 m			Weight (kg)
						Outlet	Inlet	Radiated	
CAB-125 ECOWATT	10	2970	66	0,5	485	42	49	37	13,1
	8	2600	46	0,3	420	39	45	35	
	6	1975	23	0,2	320	31	38	30	
	4	1400	11	0,1	230	21	30	24	
CAB-150 ECOWATT	10	2975	94	0,7	610	47	50	40	15,2
	8	2630	66	0,5	540	46	48	40	
	6	1985	31	0,2	400	44	42	38	
	4	1400	14	0,1	280	42	35	37	
CAB-160 ECOWATT	10	2975	103	0,7	675	47	51	40	15,2
	8	2585	69	0,5	600	47	49	40	
	6	1950	32	0,3	445	44	43	39	
	4	1390	14	0,1	310	42	36	37	
CAB-200 ECOWATT	10	2570	161	1,1	1.090	48	53	39	22,8
	8	2195	100	0,7	910	44	49	36	
	6	1715	50	0,4	710	37	43	31	
	4	1250	23	0,2	520	29	36	26	
CAB-250 ECOWATT	10	2650	219	1,4	1.220	52	58	42	24,5
	8	2390	162	1,1	1.100	47	50	29	
	6	1905	85	0,6	880	42	45	27	
	4	1410	40	0,3	660	37	38	21	
CAB-315 ECOWATT	10	1990	238	1,0	1.910	54	57	52	28,5
	8	1670	143	0,6	1.610	50	53	48	
	6	1390	88	0,4	1.360	45	48	40	
	4	1060	46	0,2	1.010	38	42	35	
CAB-355 ECOWATT	10	1940	335	1,4	2.580	54	58	49	32,5
	8	1685	224	1,0	2.260	52	55	46	
	6	1380	130	0,6	1.840	50	50	39	
	4	1070	69	0,3	1.440	40	43	33	
CAB-400 ECOWATT	10	1940	335	1,4	2.650	54	55	48	32,5
	8	1695	229	1,1	2.320	50	53	48	
	6	1380	131	0,6	1.900	45	48	40	
	4	1070	68	0,3	1.460	38	42	35	

* Medium working point on the performance curve.


DIMENSIONS (mm)

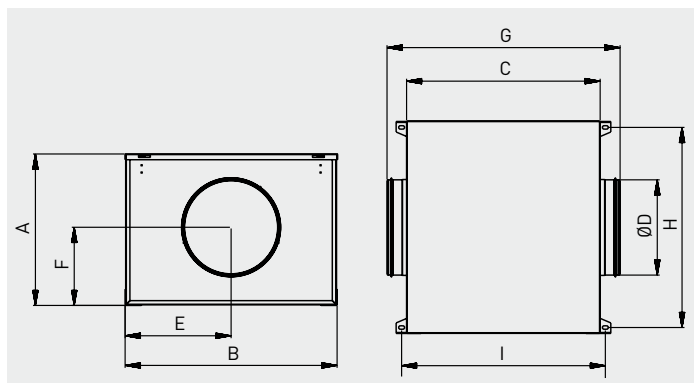

Model	A	B	C	D	E	F	G	H	I
CAB-125 ECOWATT	316	420	386	125	210	163	433	389	412
CAB-150 ECOWATT	334	447	415	150	224	174	517	416	441
CAB-160 ECOWATT	334	447	415	160	224	174	517	416	441
CAB-200 ECOWATT	375	510	468	200	255	193	570	479	494
CAB-250 ECOWATT	395	553	505	250	277	204	608	522	535
CAB-315 ECOWATT	441	609	555	315	305	221	659	585	580
CAB-355 ECOWATT	501	699	578	355	350	251	682	668	606
CAB-400 ECOWATT	501	699	578	400	350	251	682	668	606

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

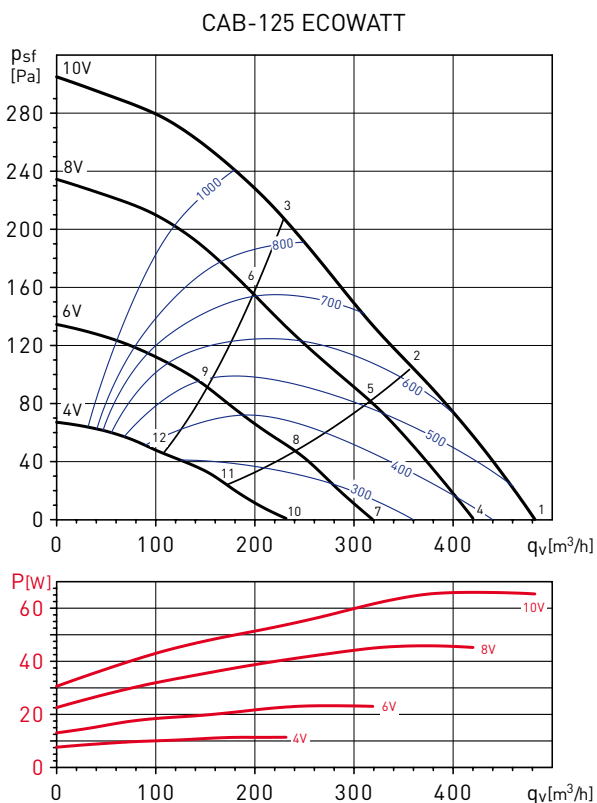


Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	38	51	57	58	56	52	47	40	63
	Outlet	38	48	51	53	52	49	45	39	58
	Radiated	34	40	43	45	44	41	38	32	50
2	Inlet	38	51	57	58	56	52	47	40	63
	Outlet	36	46	49	51	50	47	43	37	56
	Radiated	34	41	44	45	45	42	38	32	51
3	Inlet	42	55	62	62	60	56	51	44	67
	Outlet	36	46	49	51	50	47	43	37	56
	Radiated	38	44	47	49	48	45	42	36	54
4	Inlet	36	49	54	55	52	48	43	36	59
	Outlet	36	45	48	49	48	45	42	36	55
	Radiated	32	38	41	43	42	39	35	30	48
5	Inlet	36	49	54	55	52	48	43	36	59
	Outlet	34	42	45	47	46	43	39	34	53
	Radiated	32	38	41	43	42	40	36	30	49
6	Inlet	40	53	58	59	57	53	48	41	64
	Outlet	34	43	46	48	47	44	40	34	53
	Radiated	36	42	45	47	46	43	39	34	52
7	Inlet	32	45	47	48	46	42	37	30	53
	Outlet	31	37	40	42	41	38	34	28	47
	Radiated	28	34	37	39	38	35	31	25	44
8	Inlet	32	44	46	47	45	41	36	29	52
	Outlet	29	35	38	40	39	36	32	26	45
	Radiated	27	33	36	38	37	35	31	25	44
9	Inlet	36	48	50	51	49	45	40	33	56
	Outlet	29	36	39	40	39	36	33	27	46
	Radiated	31	37	40	42	41	39	35	29	48
10	Inlet	28	37	39	39	37	33	28	21	45
	Outlet	23	29	32	34	33	30	26	20	39
	Radiated	22	28	31	33	32	30	26	20	39
11	Inlet	27	36	38	39	36	32	27	20	44
	Outlet	19	25	28	30	29	26	22	17	35
	Radiated	21	28	31	33	32	29	25	19	38
12	Inlet	31	40	41	42	40	36	31	24	47
	Outlet	21	27	30	32	31	28	24	19	37
	Radiated	26	32	35	37	36	33	29	24	42

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

CAB-150 ECOWATT

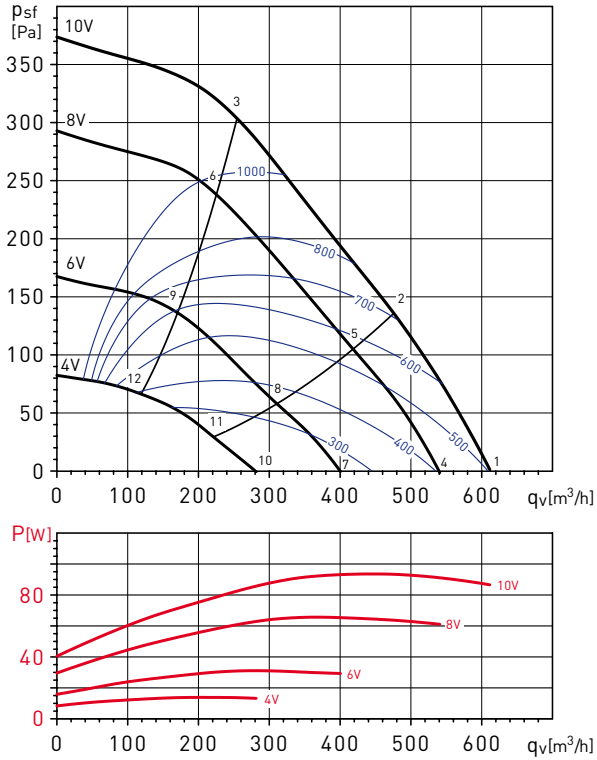



Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	39	52	60	61	59	55	50	43	66
	Outlet	34	47	57	59	57	53	48	42	63
	Radiated	42	48	50	50	48	44	39	31	56
2	Inlet	38	51	59	60	57	53	48	41	64
	Outlet	31	44	54	57	55	51	46	40	61
	Radiated	40	47	48	49	46	42	37	30	54
3	Inlet	41	54	63	63	61	57	52	45	68
	Outlet	30	43	53	56	54	51	46	39	60
	Radiated	43	50	51	52	49	45	40	33	57
4	Inlet	38	51	58	58	56	52	47	40	63
	Outlet	34	47	56	57	55	52	47	40	62
	Radiated	42	48	49	50	47	43	38	31	55
5	Inlet	36	49	56	57	55	51	46	39	62
	Outlet	32	45	54	55	54	50	45	38	60
	Radiated	41	46	48	48	46	42	36	29	54
6	Inlet	39	52	60	61	59	55	50	43	65
	Outlet	30	43	53	55	53	49	44	38	59
	Radiated	43	49	50	51	48	44	39	32	56
7	Inlet	35	48	52	52	50	46	41	34	57
	Outlet	34	47	53	54	52	48	44	37	59
	Radiated	42	46	48	48	46	42	37	30	54
8	Inlet	34	46	50	51	48	45	40	33	56
	Outlet	33	46	52	53	51	47	43	36	58
	Radiated	40	45	46	47	44	40	35	28	52
9	Inlet	36	49	54	54	52	48	43	36	59
	Outlet	31	44	51	52	50	47	42	35	57
	Radiated	42	47	48	49	47	42	37	30	54
10	Inlet	32	43	45	45	43	39	34	27	51
	Outlet	34	46	49	50	48	45	40	33	55
	Radiated	40	45	47	47	45	41	35	28	53
11	Inlet	30	41	43	43	41	37	32	25	49
	Outlet	34	47	50	51	49	45	40	34	56
	Radiated	38	43	45	45	43	39	33	26	51
12	Inlet	32	44	46	46	44	40	35	28	51
	Outlet	32	45	48	49	47	44	39	32	54
	Radiated	39	44	46	46	44	40	35	27	52

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

CAB-160 ECOWATT

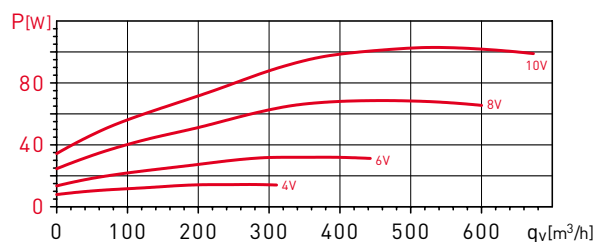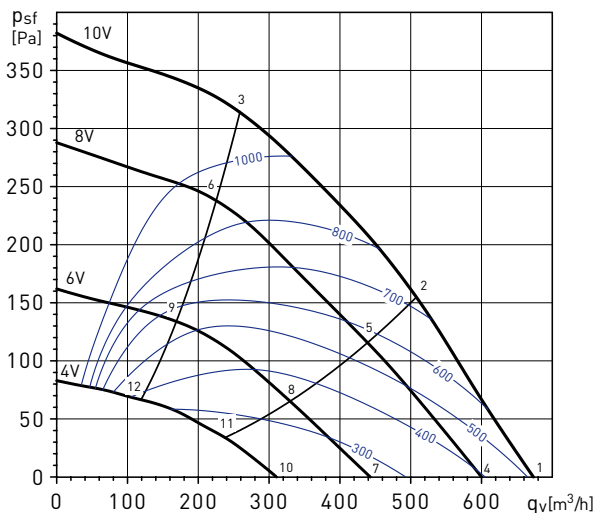



Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA	
1	Inlet	40	53	62	63	61	57	52	45	68
	Outlet	34	47	57	60	58	54	49	43	64
	Radiated	42	49	50	51	48	44	39	32	56
2	Inlet	38	51	60	61	59	55	50	43	65
	Outlet	31	44	54	57	55	52	47	40	61
	Radiated	40	47	49	49	47	42	37	30	54
3	Inlet	41	54	63	64	61	57	52	45	68
	Outlet	30	43	53	56	54	51	46	39	60
	Radiated	43	50	51	52	49	45	40	33	57
4	Inlet	39	52	60	60	58	54	49	42	65
	Outlet	34	47	57	58	57	53	48	41	63
	Radiated	43	48	50	50	48	44	39	31	56
5	Inlet	37	50	58	58	56	52	47	40	63
	Outlet	32	45	55	56	54	51	46	39	61
	Radiated	41	46	48	48	46	42	37	30	54
6	Inlet	39	52	60	61	59	55	50	43	65
	Outlet	30	43	53	55	53	49	44	38	59
	Radiated	43	49	50	51	48	44	39	32	56
7	Inlet	36	49	54	54	52	48	43	36	59
	Outlet	34	47	54	55	53	49	45	38	60
	Radiated	42	47	48	49	47	42	37	30	54
8	Inlet	34	47	52	52	50	46	41	34	57
	Outlet	33	46	53	54	52	48	43	37	58
	Radiated	40	45	47	47	45	41	35	28	53
9	Inlet	36	49	53	54	52	48	43	36	59
	Outlet	31	44	51	52	50	46	42	35	57
	Radiated	42	47	48	49	46	42	37	30	54
10	Inlet	33	45	47	48	45	41	36	29	53
	Outlet	34	47	50	51	49	46	41	34	56
	Radiated	41	45	47	48	45	41	36	29	53
11	Inlet	31	43	45	45	43	39	34	27	50
	Outlet	34	47	50	51	49	46	41	34	56
	Radiated	39	43	45	46	43	39	34	27	51
12	Inlet	32	44	46	46	44	40	35	28	51
	Outlet	32	45	48	49	47	44	39	32	54
	Radiated	40	44	46	46	44	40	35	28	52

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at $20^\circ C$ and 760 mmHg .
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

CAB-200 ECOWATT

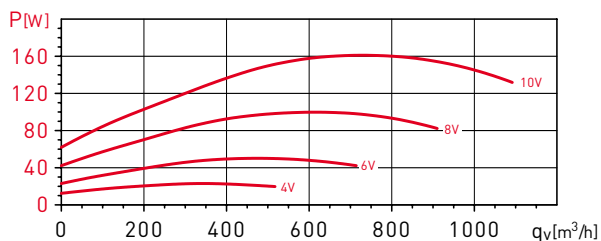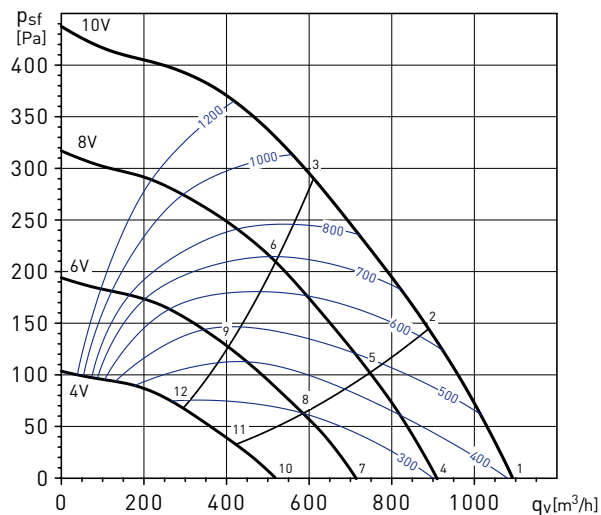


Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	47	50	56	62	64	58	59	58	68
	Outlet	51	55	54	55	58	57	53	47	64
	Radiated	51	43	46	44	44	43	45	39	55
2	Inlet	44	48	55	62	63	57	58	56	67
	Outlet	43	52	52	52	56	56	51	45	62
	Radiated	47	41	45	43	42	42	44	37	53
3	Inlet	39	52	59	63	64	59	60	57	69
	Outlet	37	54	53	52	55	57	53	48	62
	Radiated	43	45	49	45	43	44	46	39	54
4	Inlet	42	46	53	59	60	54	55	52	64
	Outlet	46	51	50	50	54	53	49	42	60
	Radiated	44	44	46	43	43	42	40	32	52
5	Inlet	40	45	52	57	59	53	54	51	63
	Outlet	39	48	48	49	52	52	47	40	58
	Radiated	41	42	45	41	41	41	38	30	50
6	Inlet	35	45	55	58	58	54	54	51	63
	Outlet	35	50	50	51	52	52	49	42	58
	Radiated	37	43	48	41	41	41	38	30	52
7	Inlet	36	40	49	53	54	48	50	44	59
	Outlet	39	44	45	44	48	47	43	34	53
	Radiated	37	38	42	37	37	35	33	27	46
8	Inlet	35	39	48	51	53	47	48	43	57
	Outlet	31	42	43	41	46	44	40	32	51
	Radiated	35	37	41	35	35	33	31	25	45
9	Inlet	31	41	50	52	53	49	49	44	58
	Outlet	32	45	45	41	45	46	44	35	52
	Radiated	32	39	43	35	36	35	32	27	46
10	Inlet	28	33	43	46	47	41	44	33	52
	Outlet	30	36	40	37	40	38	35	25	46
	Radiated	30	32	36	32	33	30	33	26	41
11	Inlet	27	33	43	45	45	40	40	32	50
	Outlet	24	35	38	34	37	36	31	25	43
	Radiated	29	31	36	31	32	29	28	25	40
12	Inlet	28	34	41	44	45	41	39	33	50
	Outlet	29	37	37	34	38	38	33	26	45
	Radiated	29	32	34	30	31	30	28	26	40

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

CAB-250 ECOWATT

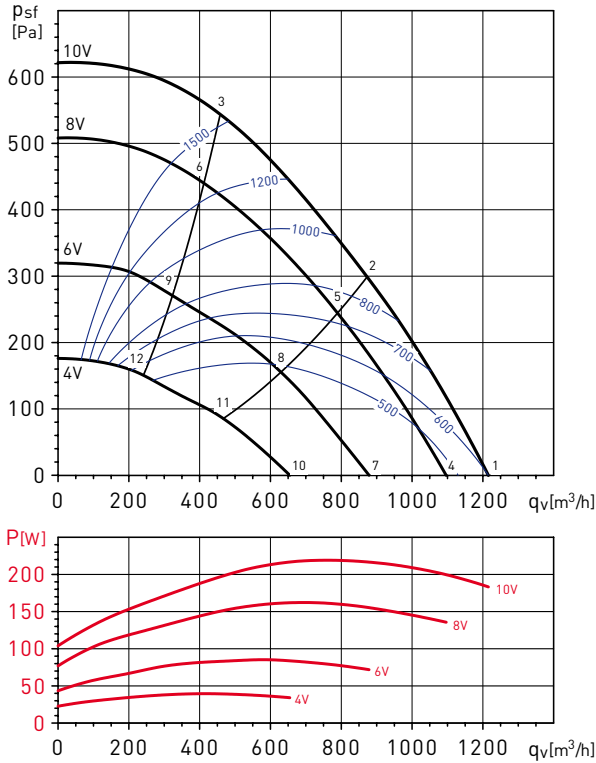



Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	42	54	66	68	71	67	63	58	75
	Outlet	48	54	60	57	61	64	60	51	68
	Radiated	40	44	55	50	50	45	37	32	58
2	Inlet	40	52	65	65	66	64	63	58	72
	Outlet	41	51	60	53	58	62	58	51	66
	Radiated	38	41	55	47	46	42	36	31	56
3	Inlet	38	54	68	67	68	66	64	60	74
	Outlet	40	51	60	55	59	65	60	54	68
	Radiated	36	44	58	49	47	45	38	33	59
4	Inlet	39	52	64	65	68	64	60	56	72
	Outlet	45	52	58	54	58	62	57	48	66
	Radiated	37	44	53	48	49	44	36	31	56
5	Inlet	38	50	62	63	64	62	60	55	69
	Outlet	40	49	57	50	55	60	55	48	64
	Radiated	35	42	52	46	44	42	36	30	54
6	Inlet	36	54	65	64	65	64	62	57	71
	Outlet	38	50	58	52	56	63	57	51	66
	Radiated	33	45	54	47	45	44	37	32	56
7	Inlet	36	49	59	59	63	59	53	49	67
	Outlet	39	48	56	48	52	56	50	41	61
	Radiated	33	42	49	43	44	39	31	27	52
8	Inlet	33	47	58	57	58	56	53	48	64
	Outlet	34	45	54	46	51	55	48	41	59
	Radiated	30	40	48	41	39	37	31	26	50
9	Inlet	32	52	58	58	59	58	54	49	65
	Outlet	33	48	52	46	51	57	50	43	60
	Radiated	29	45	49	42	40	39	32	27	51
10	Inlet	29	45	49	52	55	52	45	38	59
	Outlet	32	44	41	40	44	49	41	32	52
	Radiated	28	40	38	35	36	33	29	25	44
11	Inlet	28	47	48	50	51	49	43	38	56
	Outlet	30	44	41	41	45	48	39	32	52
	Radiated	27	41	37	33	32	31	28	25	44
12	Inlet	27	47	49	51	52	50	45	38	57
	Outlet	31	46	42	43	47	49	40	33	53
	Radiated	26	42	38	34	32	32	29	26	45

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

CAB-315 ECOWATT

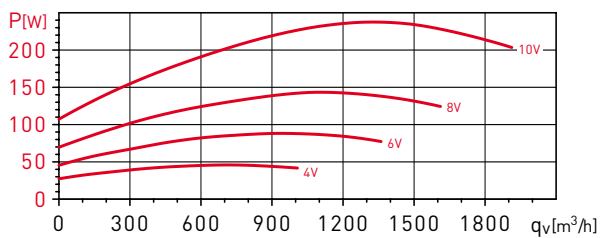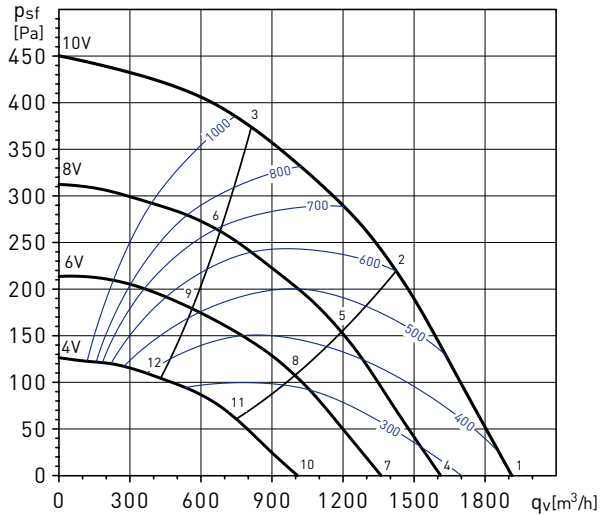



Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	41	54	67	67	66	63	59	57	72
	Outlet	47	57	66	59	64	60	53	46	69
	Radiated	42	48	65	54	57	54	49	46	66
2	Inlet	41	54	67	66	64	59	56	53	71
	Outlet	43	55	65	56	62	58	51	44	68
	Radiated	42	48	65	53	55	50	46	42	66
3	Inlet	41	58	67	66	64	58	55	51	71
	Outlet	41	53	63	56	62	60	56	48	68
	Radiated	42	52	65	53	54	49	45	40	66
4	Inlet	39	53	62	63	63	58	53	54	68
	Outlet	43	55	62	55	59	56	48	42	65
	Radiated	40	46	59	49	53	53	43	41	61
5	Inlet	40	54	64	61	59	53	49	49	67
	Outlet	41	53	61	52	58	53	45	38	64
	Radiated	40	47	61	47	50	48	39	36	62
6	Inlet	38	58	62	61	59	54	49	45	67
	Outlet	39	51	58	52	58	56	51	40	63
	Radiated	38	51	59	47	50	49	39	31	60
7	Inlet	39	54	57	59	59	53	49	50	64
	Outlet	41	56	52	50	57	51	43	40	61
	Radiated	39	50	50	45	51	44	38	36	56
8	Inlet	37	55	54	57	55	48	45	40	62
	Outlet	38	54	49	47	55	48	40	36	59
	Radiated	37	51	47	43	48	39	34	26	54
9	Inlet	35	57	54	57	55	49	44	39	62
	Outlet	35	52	48	47	56	50	42	35	59
	Radiated	35	52	47	43	48	40	33	25	55
10	Inlet	35	48	50	55	52	43	46	31	58
	Outlet	37	49	46	46	49	43	40	30	54
	Radiated	37	45	44	43	48	37	36	24	52
11	Inlet	32	46	48	54	48	41	37	29	56
	Outlet	34	46	42	47	47	41	34	30	52
	Radiated	33	42	41	42	45	34	27	22	49
12	Inlet	33	48	49	55	49	41	36	30	58
	Outlet	33	45	42	46	47	42	31	29	52
	Radiated	34	44	42	43	46	35	26	23	50

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

CAB-355 ECOWATT

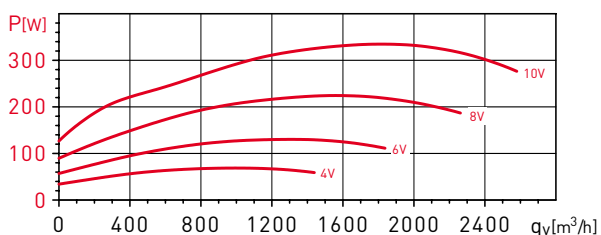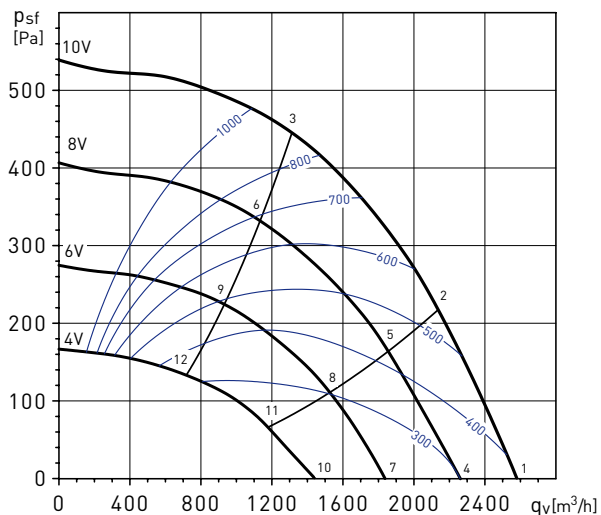


Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	46	58	67	67	67	66	64	63	74
	Outlet	52	59	63	62	66	62	55	49	70
	Radiated	41	49	62	53	55	53	48	49	64
2	Inlet	42	55	67	66	66	63	60	59	72
	Outlet	45	55	63	59	63	60	52	46	68
	Radiated	37	46	61	52	54	51	45	45	63
3	Inlet	39	58	65	64	63	60	58	55	70
	Outlet	41	55	61	56	61	58	51	46	66
	Radiated	34	48	60	50	51	47	42	41	61
4	Inlet	41	58	64	64	65	63	58	61	71
	Outlet	48	56	62	58	63	59	51	46	67
	Radiated	36	49	59	49	53	51	42	48	61
5	Inlet	37	55	64	62	63	58	55	56	69
	Outlet	41	53	63	54	61	56	48	42	66
	Radiated	32	46	59	47	51	46	38	42	60
6	Inlet	37	61	61	60	58	52	52	48	67
	Outlet	38	53	61	51	59	54	47	41	64
	Radiated	32	52	56	45	46	40	36	35	58
7	Inlet	37	58	57	60	65	58	54	57	68
	Outlet	42	58	52	52	63	53	46	42	65
	Radiated	34	50	47	44	50	45	38	44	56
8	Inlet	33	58	55	58	60	51	50	50	64
	Outlet	37	56	49	49	63	51	42	37	64
	Radiated	30	51	45	42	45	38	34	37	53
9	Inlet	34	56	53	56	57	48	47	42	62
	Outlet	35	54	47	46	63	49	41	34	63
	Radiated	29	50	44	40	49	35	31	29	53
10	Inlet	32	51	52	55	56	49	52	38	61
	Outlet	36	52	46	47	52	47	43	30	57
	Radiated	30	43	42	46	45	37	39	30	51
11	Inlet	29	49	50	52	50	43	46	33	57
	Outlet	33	49	43	45	51	44	38	26	54
	Radiated	27	41	40	43	39	31	33	25	47
12	Inlet	28	47	47	50	47	40	39	33	54
	Outlet	31	45	41	42	50	41	33	26	52
	Radiated	26	39	37	41	36	28	26	25	45

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$ (blue curves).
- Dry air at 20°C and 760 mmHg.
- Performance data in accordance with ISO 5801 and AMCA 210-99 Standards.

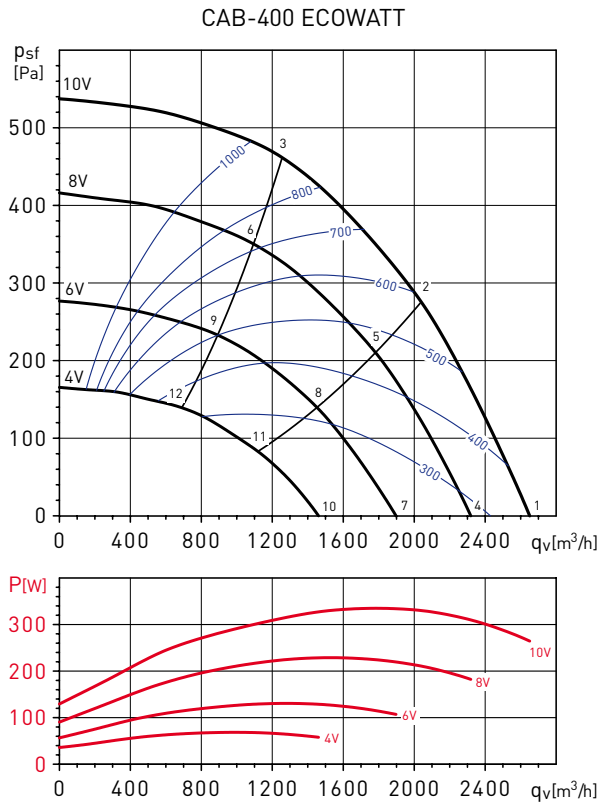

Sound power level spectrums in dB(A)

Working point		63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	46	58	65	67	65	66	61	57	72
	Outlet	46	59	64	63	67	63	56	49	71
	Radiated	44	50	62	56	58	58	51	47	65
2	Inlet	40	54	63	64	62	60	53	51	69
	Outlet	41	54	63	59	64	60	52	46	68
	Radiated	38	46	60	53	55	52	44	41	62
3	Inlet	41	58	64	63	58	54	51	47	68
	Outlet	41	57	61	58	62	58	53	47	67
	Radiated	39	50	61	52	51	46	41	38	62
4	Inlet	39	53	62	63	63	58	53	54	68
	Outlet	43	55	62	55	59	56	48	42	65
	Radiated	40	46	59	49	53	53	43	41	61
5	Inlet	40	54	64	61	59	53	49	49	67
	Outlet	41	53	61	52	58	53	45	38	64
	Radiated	40	47	61	47	50	48	39	36	62
6	Inlet	38	58	62	61	59	54	49	45	67
	Outlet	39	51	58	52	58	56	51	40	63
	Radiated	38	51	59	47	50	49	39	31	60
7	Inlet	39	54	57	59	59	53	49	50	64
	Outlet	41	56	52	50	57	51	43	40	61
	Radiated	39	50	50	45	51	44	38	36	56
8	Inlet	37	55	54	57	55	48	45	40	62
	Outlet	38	54	49	47	55	48	40	36	59
	Radiated	37	51	47	43	48	39	34	26	54
9	Inlet	35	57	54	57	55	49	44	39	62
	Outlet	35	52	48	47	56	50	42	35	59
	Radiated	35	52	47	43	48	40	33	25	55
10	Inlet	35	48	50	55	52	43	46	31	58
	Outlet	37	49	46	46	49	43	40	30	54
	Radiated	37	45	44	43	48	37	36	24	52
11	Inlet	32	46	48	54	48	41	37	29	56
	Outlet	34	46	42	47	47	41	34	30	52
	Radiated	33	42	41	42	45	34	27	22	49
12	Inlet	33	48	49	55	49	41	36	30	58
	Outlet	33	45	42	46	47	42	31	29	52
	Radiated	34	44	42	43	46	35	26	23	50

MOUNTING ACCESSORIES



MBE
Electric heaters.




MFL-G4
Filtration boxes.



ACOPEL F400 N
Circular flexible connector.



KSE-45
Flexible supports
Rubber anti-vibration
mounts to reduce
vibration and noise
transmission to the
installation.
[1KSE = set of 4
supports per bag].



CAR
Circular back
draft shutters.



APC
Discharge protection
guards for direct
connection to the
inlet-outlet flange.
(please see
pages Mounting
Accessories).

ELECTRICAL ACCESSORIES



**CONTROL ECOWATT
AC/DC**
Control element for
demand controlled
ventilation systems.



REB-ECOWATT
Speed controller for
fans fitted with EC
motor.




SC02-A
CO₂ and temperature
sensor.
SC02-AD
CO₂ and
temperature sensor,
with display.
SCHT-AD
CO₂ sensor,
temperature and
relative humidity
with display.



TDP-S / TDP-D
Pressure sensor.



CPFL-S / CPFL-E
Presence detector.



REMP
Motorised dampers.