



CK METALICO

5211419600 - CK-50 (230V 50) - KITCHEN EXTRACT FANS



Centrifugal extractors manufactured from sheet steel with an epoxy polyester paint finished. All extractors are fitted with centrifugal impeller and single phase 230V 50Hz speed controllable motor, Class B.

Theoretical Working Point

Airflow	-
Static Pressure	0,000 Pa
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m ³
Frequency	50 Hz

Construction

Discharge diameter	115 mm
Fan size	50
Weight	3,60 kg


Motor Characteristics

Voltage	1-230V-50Hz
Maximum absorbed current	0,5 A
Motor insulation class	B

Working Point


Fan speed	1300
-----------	------

Drawing (mm)




A	B	C	D	E
115	315	375	315	132

Performance Chart

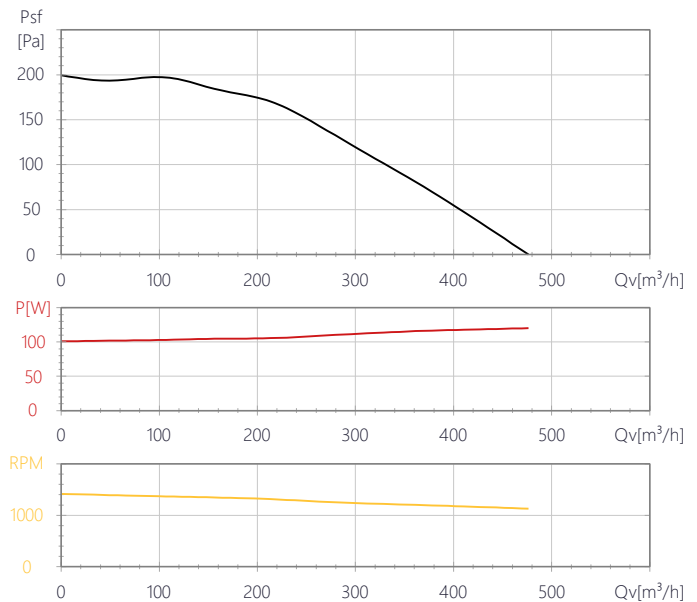



Performance Chart

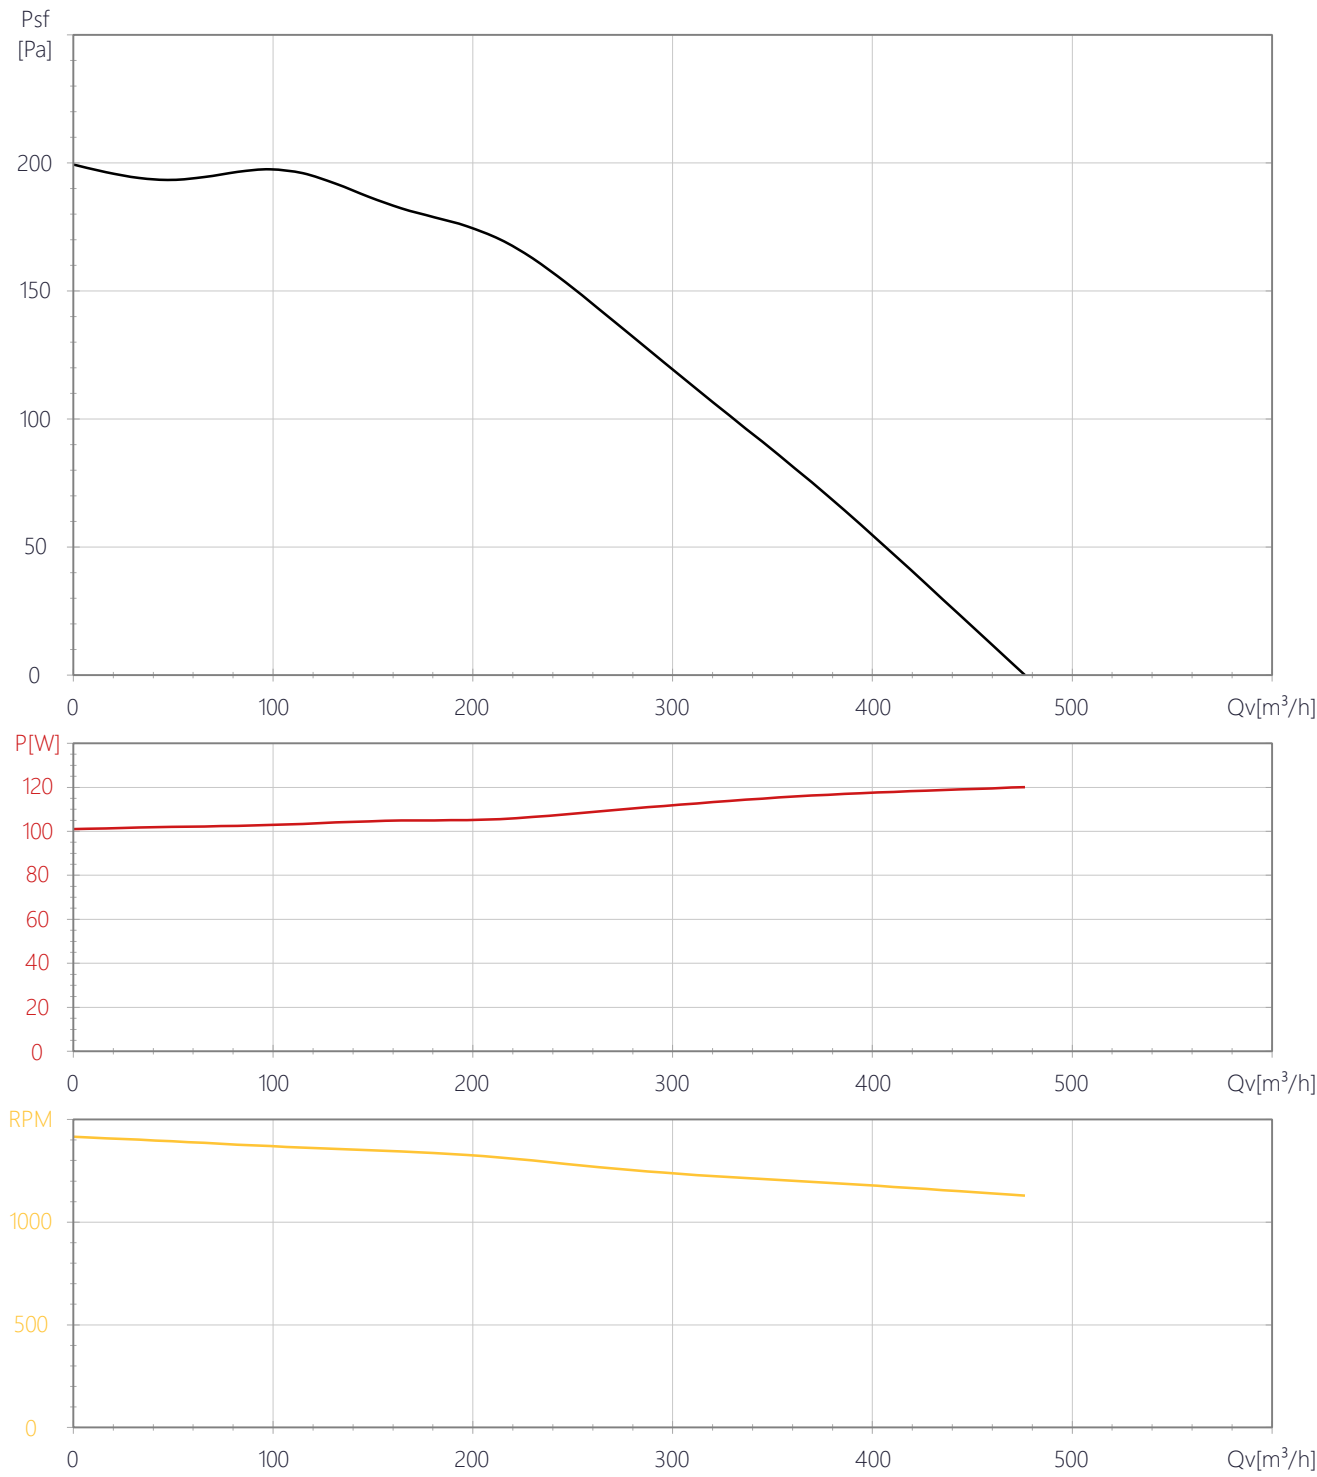




CK METALICO

5211419600 - CK-50 (230V 50) - KITCHEN EXTRACT FANS

Drawing (mm)

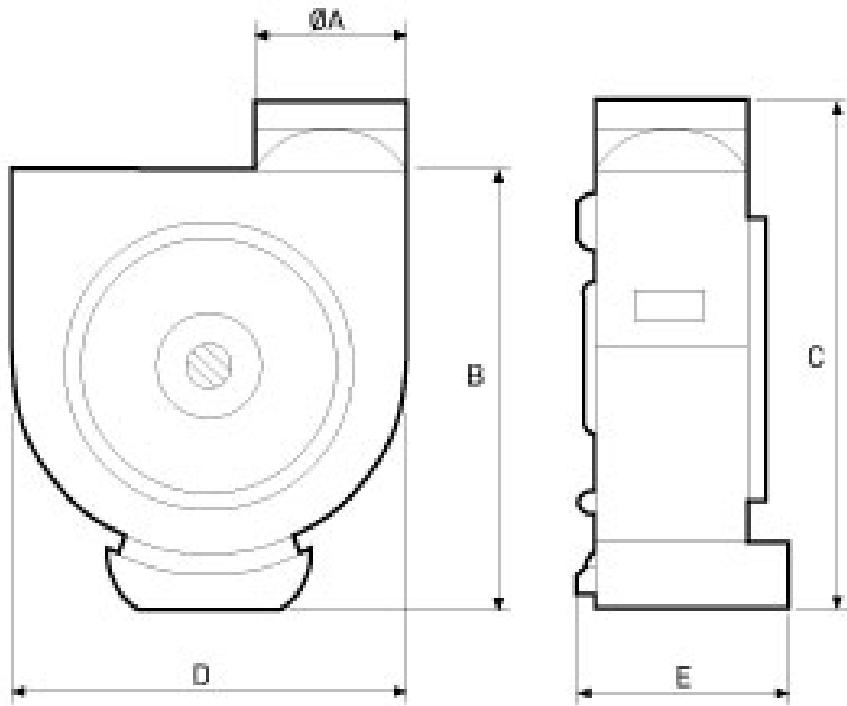

A	B	C	D	E
115	315	375	315	132




Accessories

5401304100 - REB-CVF (0-10V)



5401640600 - INTER 4P

Three speed switch.Fan ON/OFF and speed selector.Maximum current rating 4A.

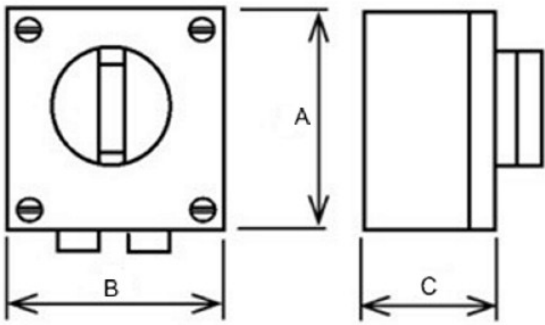

Dimensions		
A	B	C
86	86	60.4




CK METALICO

5211419600 - CK-50 (230V 50) - KITCHEN EXTRACT FANS

5401306500 - COM-3




Three-speed switch.Fan ON/OFF and speed selector.Maximum current rating 4A.

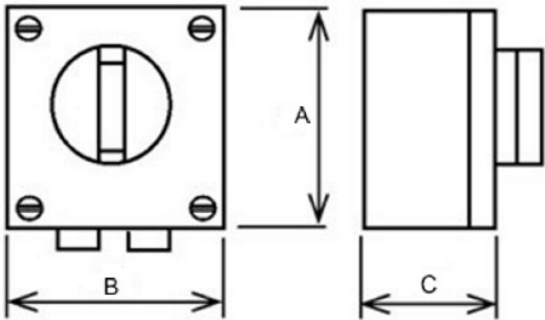

Dimensions		
A	B	C
90	90	75

L0111000000081 - REB-1 230V 50/60 ELECTRONIC SPEED CONTROLLER

Electronic single phase speed controller, 3-wire control, surface mounted, fuse protected with separate on/off switch.

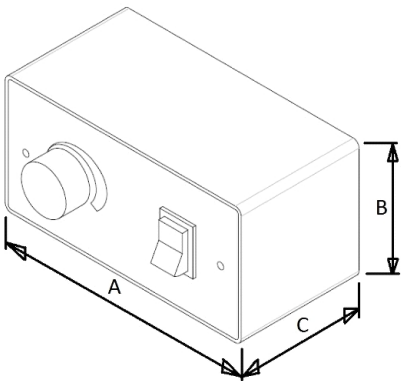

Dimensions		
A	B	C
105	83	40