



EDM

5211519300 - EDM-100 CH 'Z' (220-240V 50HZ) RE



Axial extractor with pilot light, back draft shutter, humidistat, cord and ball bearings, IP30, class II, with thermal protection, to work at temperatures up to 40°C, to connect at 230V.

Theoretical Working Point

Airflow	-
Static Pressure	0,000 Pa
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m ³
Frequency	50 Hz

Construction

Discharge diameter	98 mm
Fan size	100
Weight	0,48 kg

Motor Characteristics

Voltage	1-230V-50Hz
Maximum absorbed current	0,1 A
IP Rating	IP30
Motor insulation class	B

Working Point

Fan speed	2572
-----------	------

Warning




EDM


5211519300 - EDM-100 CH 'Z' (220-240V 50HZ) RE



Performance Chart

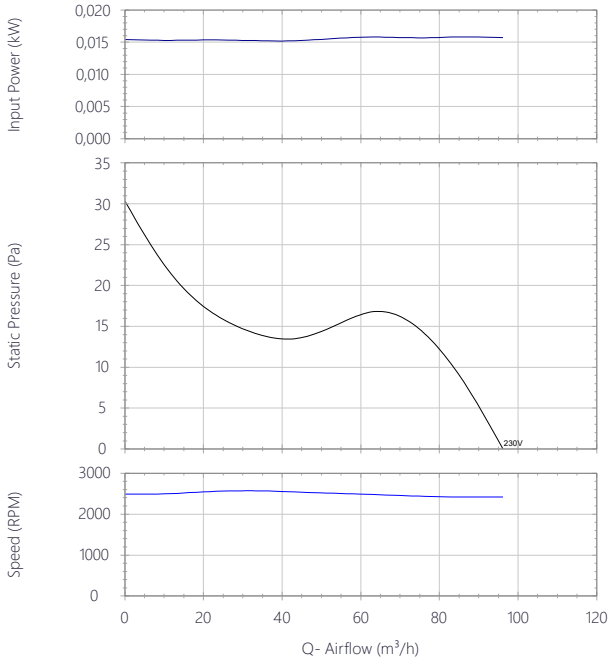

Drawing

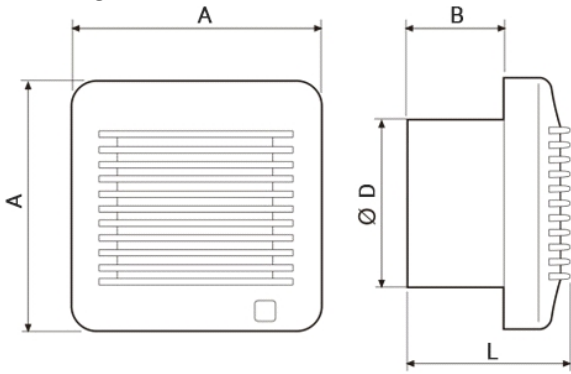

A	B	D	L
155	55	98	98




EDM

5211519300 - EDM-100 CH 'Z' (220-240V 50HZ) RE



Performance Chart

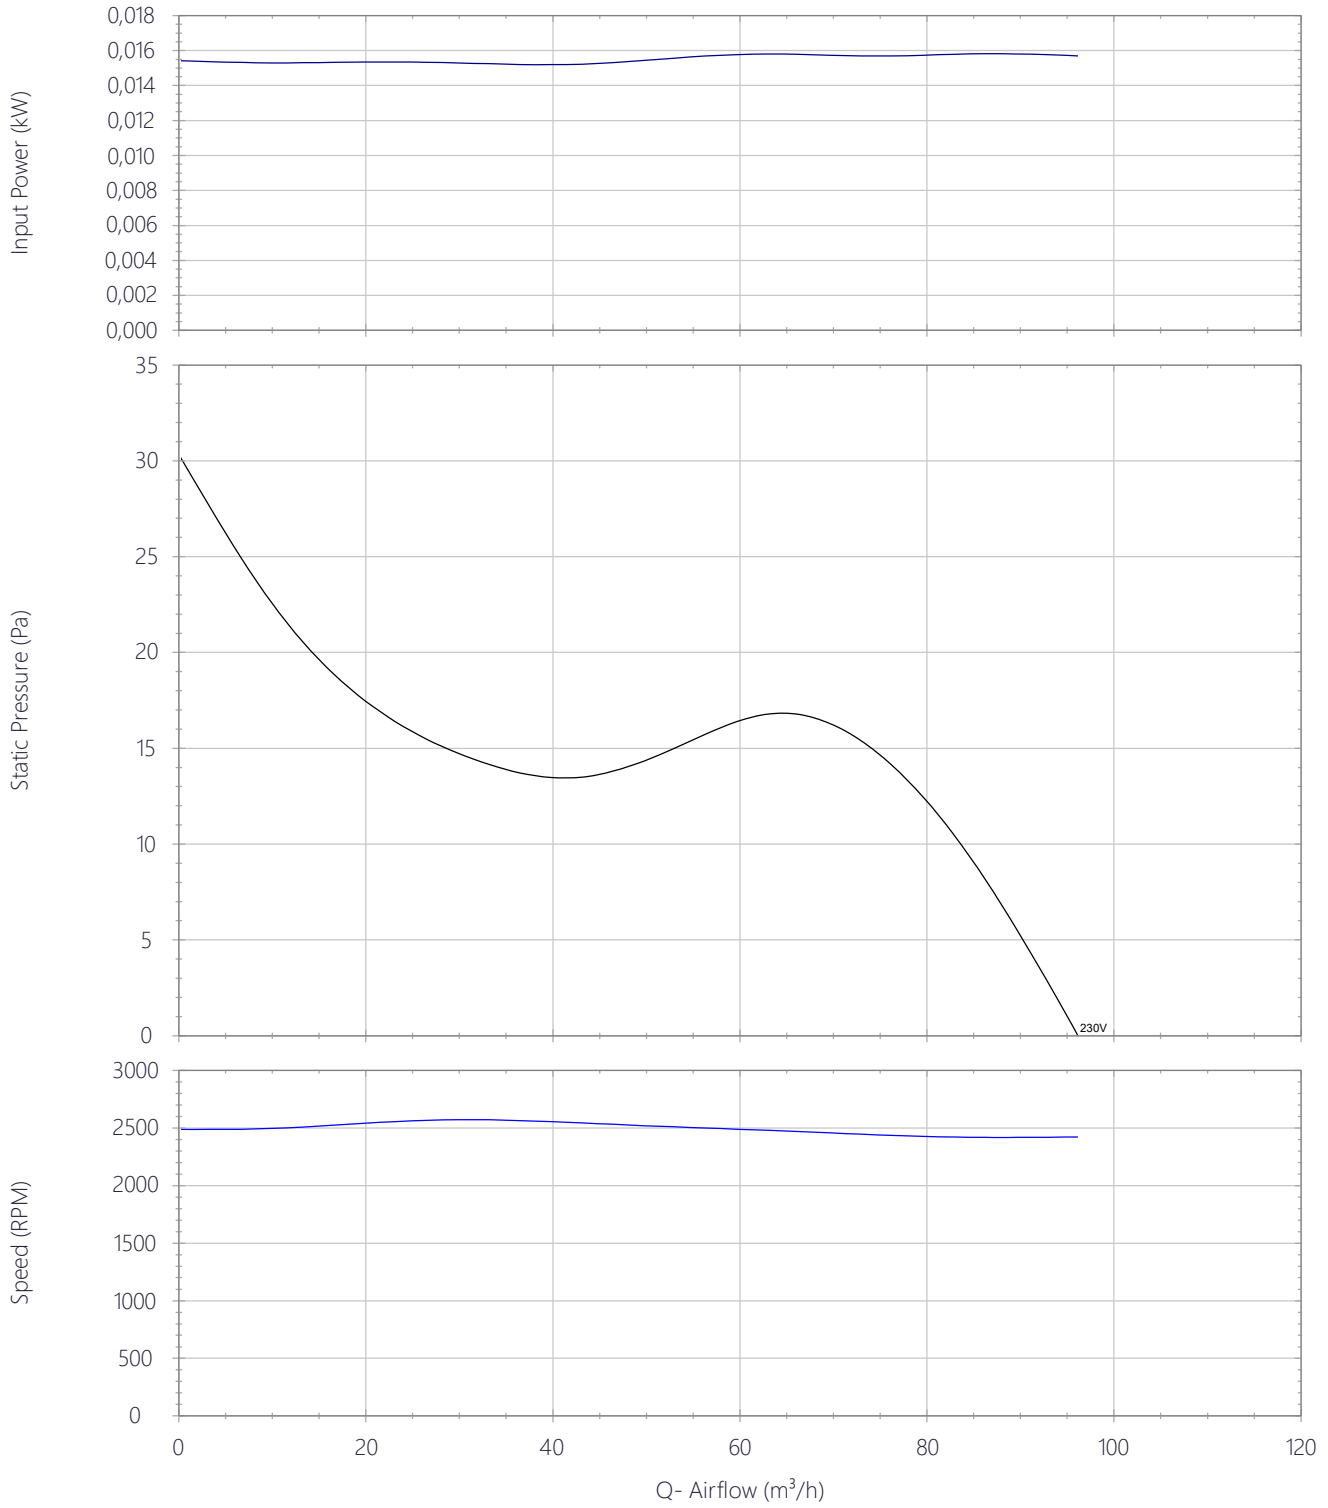




EDM

5211519300 - EDM-100 CH 'Z' (220-240V 50HZ) RE

Drawing

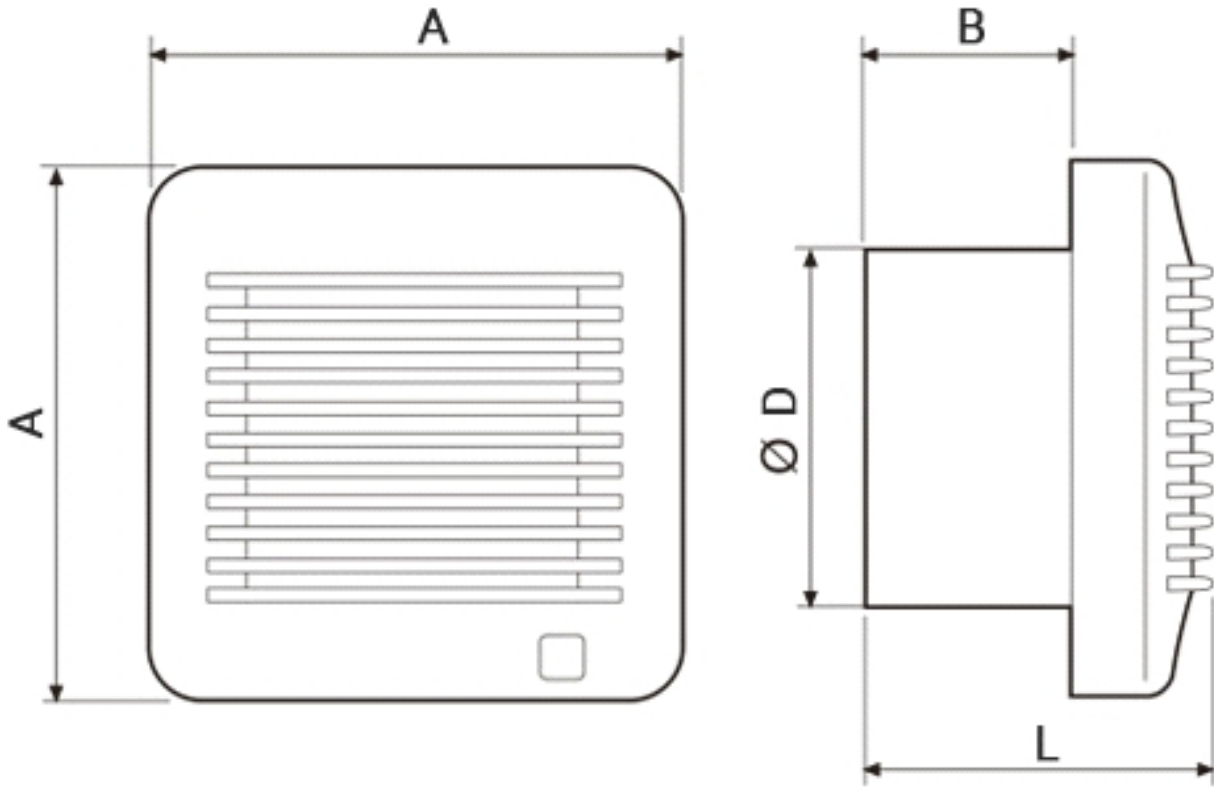

A	B	D	L
155	55	98	98