

FPF13KUGC-110

EMC version without fan




FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
<b>APPROVALS</b>		
Approvals	CE	
<b>MECHANICAL DATA</b>		
Mounting Wall Thickness	1.5-2.2 0.06-0.09	mm in
<b>GENERIC DATA</b>		
Spare Parts Filter Media	M13FPF-EU3	
RAL Number	7035	
Filter Class	ISO coarse 55%	ISO 16890
Filter Class	G3	EN 779
Filter Material	thermo-linked progressive structure synthetic fibre	
<b>ENVIRONMENTAL AND THERMAL DATA</b>		
IP Protection Degree	IP54	
Operating Temperature	-10÷60	°C
	14÷140	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F


FPF13KUGC-110


EMC version without fan

Technical drawing mm (in)

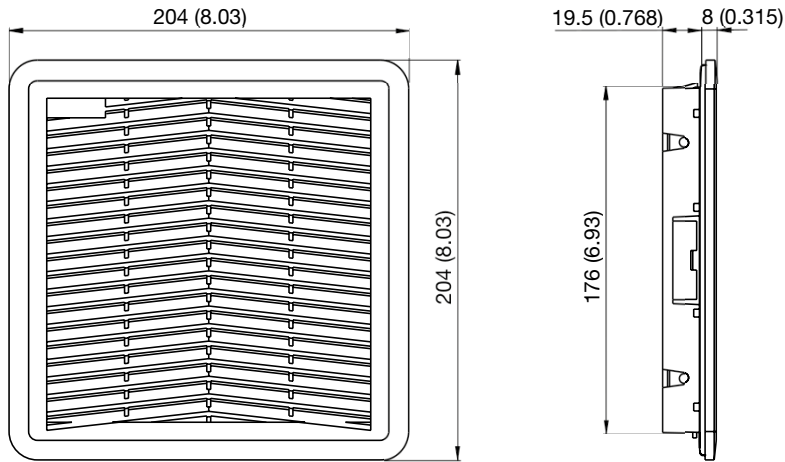

Mounting cut-out mm (in)

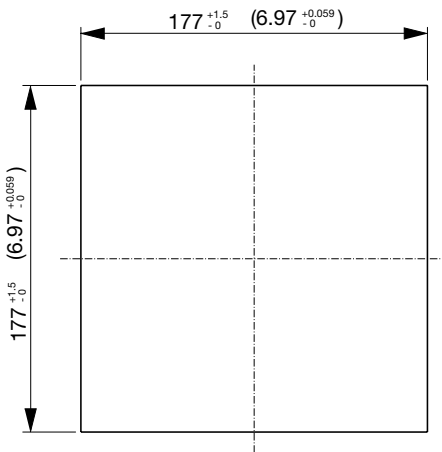

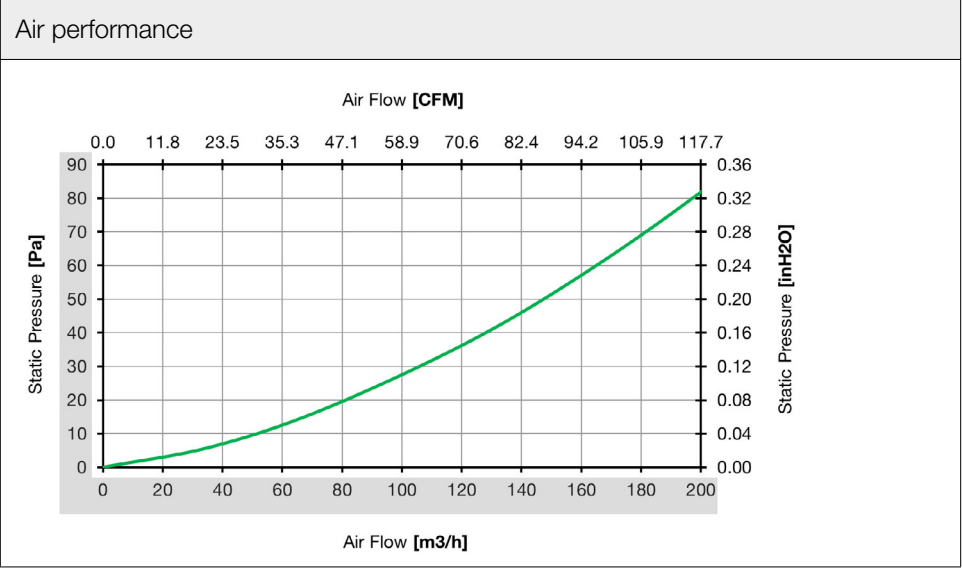

All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.