



HCBB/HCBT

5605343200 - HCBB/2-315/H-A E70 (230V50HZ) IE2 VX - PLATE MOUNTED AXIAL FLOW FANS



Range of low profile plate mounted axial fans fitted with aluminium impellers and single phase motor (HCBB), , Class insulation, equipped with thermal protection*.
*Except models Ø 800 to 1000.

Motors

Available, depending upon the model, with single or three phase motors in 4 or 6 poles. All motors are speed controllable by autotransformer except models /4-630, B/710, T/4-710, T/800, T/900 and T/1000.

Electrical supplies:

Single phase 230V-50Hz.

(Capacitor located inside the wiring terminal box).

Trade S&P model HCBB/2-315/H-A E70 (230V50HZ) IE2 VX

Theoretical Working Point

Airflow	-
Static Pressure	0,000 Pa
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m ³
Frequency	50 Hz

Construction

Discharge diameter	315 mm
Fan size	315
Blades	0
Weight	10,62 kg


Motor Characteristics

Number of poles	2
Voltage	1-230V-50Hz
Maximum absorbed current	3,4 A
Motor insulation class	

Working Point

Fan speed	2670
-----------	------

Performance Chart

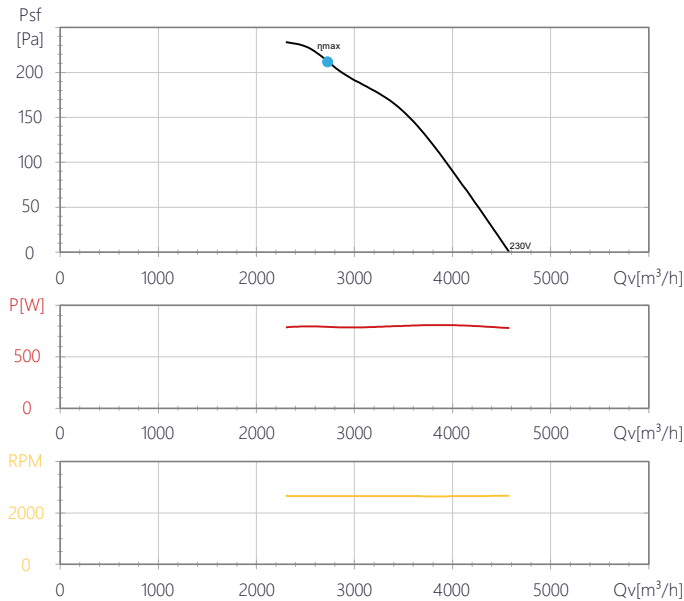



HCBB/HCBT

5605343200 - HCBB/2-315/H-A E70 (230V50HZ) IE2 VX - PLATE MOUNTED AXIAL FLOW FANS

Performance Chart

