

# HRB/4-500/25 BPN


## IP54




Dimensiones y conexiones  
Dimensions and wiring

### Características Characteristics

|   |                              |
|---|------------------------------|
| <b>Tensión</b><br><i>Voltage</i>                                      | 1 ~ 230V 50Hz                |
| <b>Tipo motor</b><br><i>Motor type</i>                                | 4 polos<br>4 poles IP54 cl.F |
| <b>Potencia absorbida máxima</b><br><i>Maximum power absorbed</i>     | 0,64 kW                      |
| <b>Intensidad absorbida máxima</b><br><i>Maximum absorbed current</i> | 2,8 A                        |
| <b>Condensador</b><br><i>Capacitor</i>                                | 12 µF/400V                   |
| <b>Ia/In</b><br><i>Is/In</i>  | 2,9                          |
| <b>Temperatura del aire</b><br><i>Air temperature</i>                 | -40°C < T < +70°C            |
| <b>Peso</b><br><i>Weight</i>  | 12,6 kg                      |
| <b>Código ventilador</b><br><i>Fan code number</i>                    | <b>5700196800</b>            |
| <b>Código motor</b><br><i>Motor code number</i>                       | <b>0342548005</b>            |

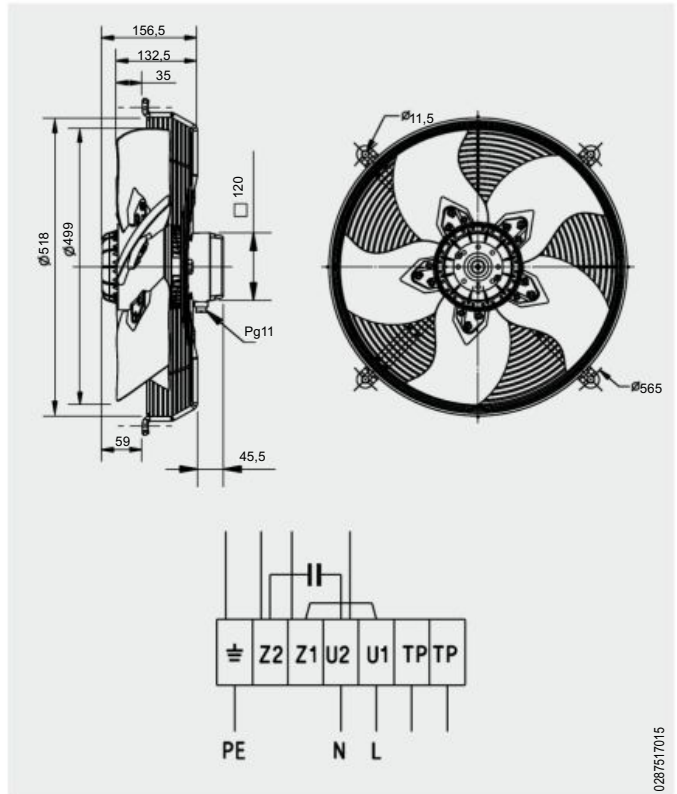

### Curvas características / Performance curves (05/03/2012)

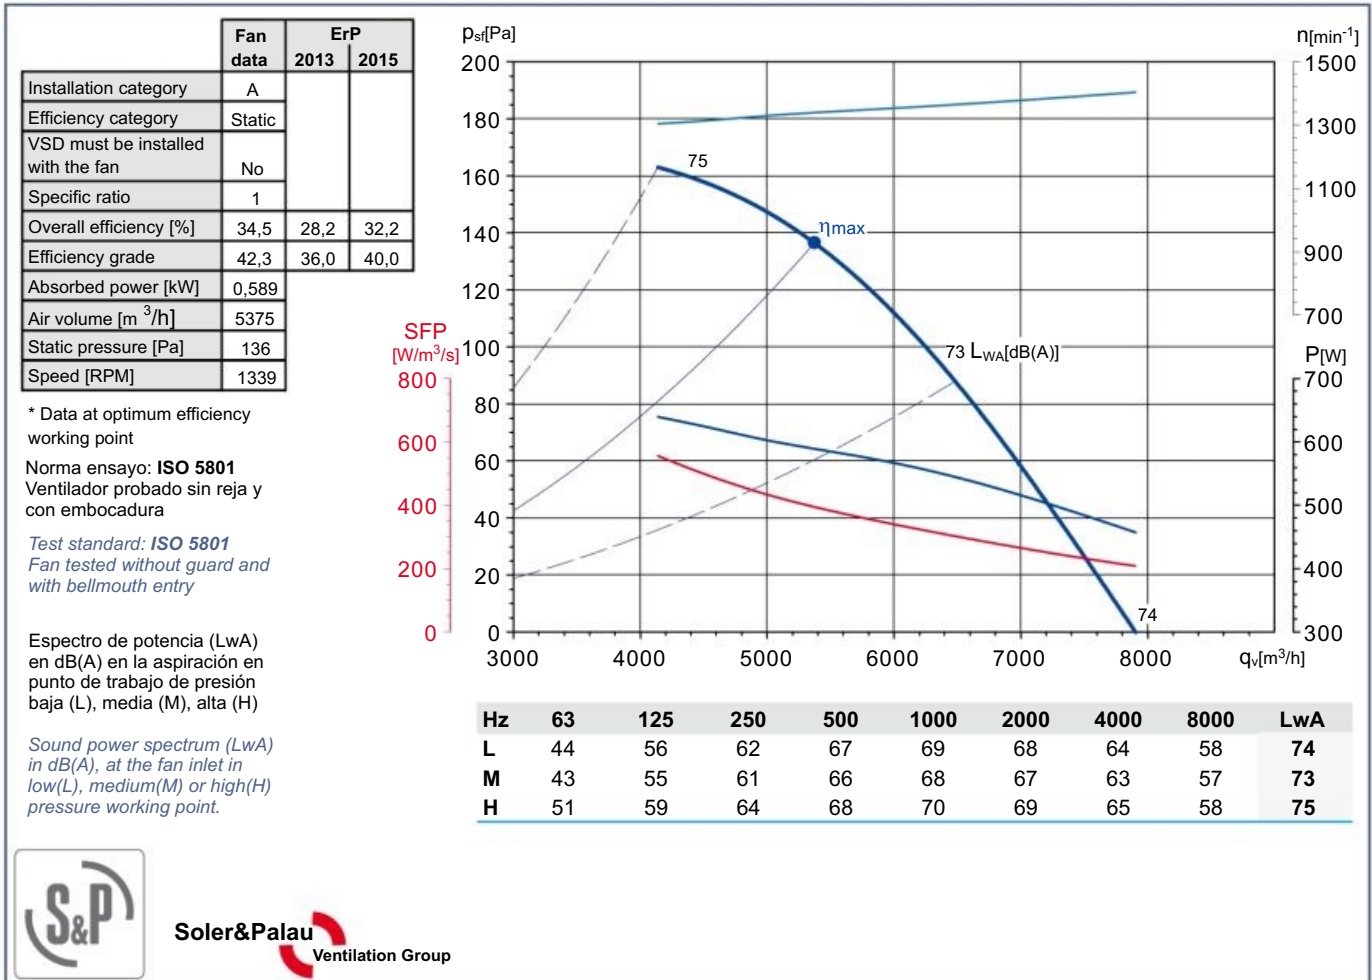

Soler&Palau  
Ventilation Group