


- Soundproof centrifugal fan with backward curved impeller
- Galvanized sheet steel housing
- Connection spigots with double lip seal
- Swing-out fan unit
- EC motor, external rotor, steplessly controllable
- Internal electronic temperature monitoring
- Suitable for outdoor installation



FAN CURVES

Name	Value	Unit
Volume flow	487	m³/h
Pressure	10	Pa

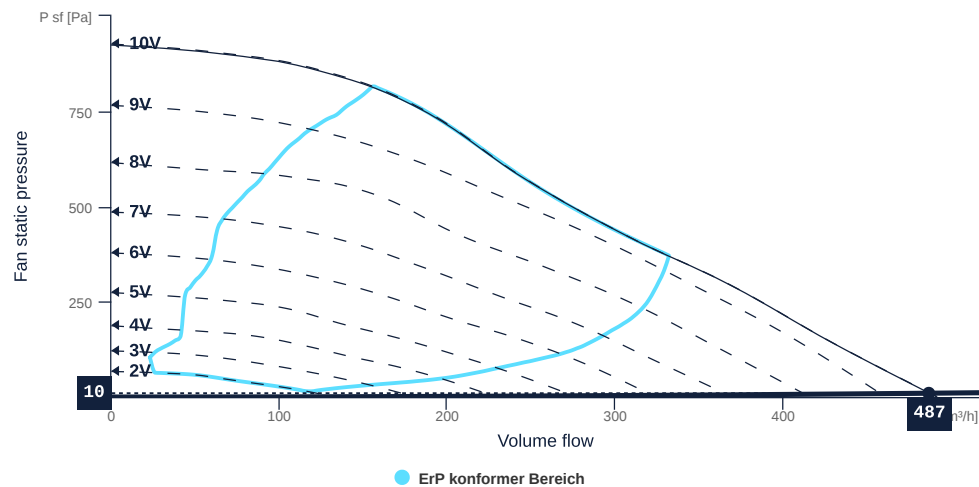

TECHNICAL SPECIFICATIONS

Name	Value	Unit	Formula symbol
Volume flow	487	m³/h	QV _{calc}
Pressure	10	Pa	psf _{calc}
Fan pressure	82	Pa	pf
Fan static pressure	10	Pa	psf
Current consumption Motor	0	A	I _e
Electrical power consumption	123	W	P _{ek}
Control voltage	9	V	U _{ctrl}
Rotation speed	3844	1/min	N
Total static efficiency	1	%	etaFaPeK
Total efficiency	9	%	etatPeK
SFP (entire device)	911	W/(m³/s)	sfp _{device}
Sound power level inlet	64	dB(A)	LwA5
Sound power level outlet	79	dB(A)	LwA6
Sound power level housing radiation	66	dB(A)	LwA2

SOUND DATA

Sound power	mid-frequency tape										Unit	Formula symbol
	Σ	63	125	250	500	1000	2000	4000	8000	16000		
suction	64	48	55	59	60	53	51	50	43	24	dB(A)	LwA5
blowout	80	46	60	66	76	75	73	67	59	39	dB(A)	LwA6
Casing break out	66	48	54	54	65	49	40	35	28	5	dB(A)	LwA2

SOUND PRESSURE LEVEL CALCULATOR

Name	Value	Unit
Enveloping surface	Halphsphere	
Distance	3	m

Sound pressure	NR	mid-frequency tape										Unit	Formula symbol
		Σ	63	125	250	500	1000	2000	4000	8000	16000		
suction	41	47	30	37	41	43	36	34	32	26	7	dB(A)	LwA5
blowout	57	62	29	43	49	58	57	56	49	41	21	dB(A)	LwA6
Casing break out	47	49	30	37	36	48	31	22	17	11	0	dB(A)	LwA2



to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN125		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IP54		IP _{compl}
IP-Protection class (terminal box)	IP66		IP _{ebox}
Weight	12.23	kg	m
Nominal air flow rate, nominal point m³/h	172.8	m³/h	q _{v,nom}
Nominal external pressure, static	360.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.05	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.05	kW	P _{e,nom}
Face velocity, nominal point	3.9	m/s	v _{nom}
Nominal external pressure, static	360.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	49.7	%	η _{es,SUP}
Highest external air leakage rate	1.58	%	
Enclosure sound level, nominal point	62	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

MAXIMAL DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	118	118	W	P _{ed, max}
Max. operating current (device)	1	1	A	I _{ed, max}
Max. speed	4010	4010	1/min	n _{max}
Max. stat. efficiency	32.5	32.5	%	η _{es}
Max. fan efficiency	33.4	33.4	%	η _e
Max. flowrate	490	490	m³/h	Q _{v, max}
Max. stat pressure	930	930	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.560000	0.000000		cos φ
UL-Certification motor		None		ULcert



to the product detail page

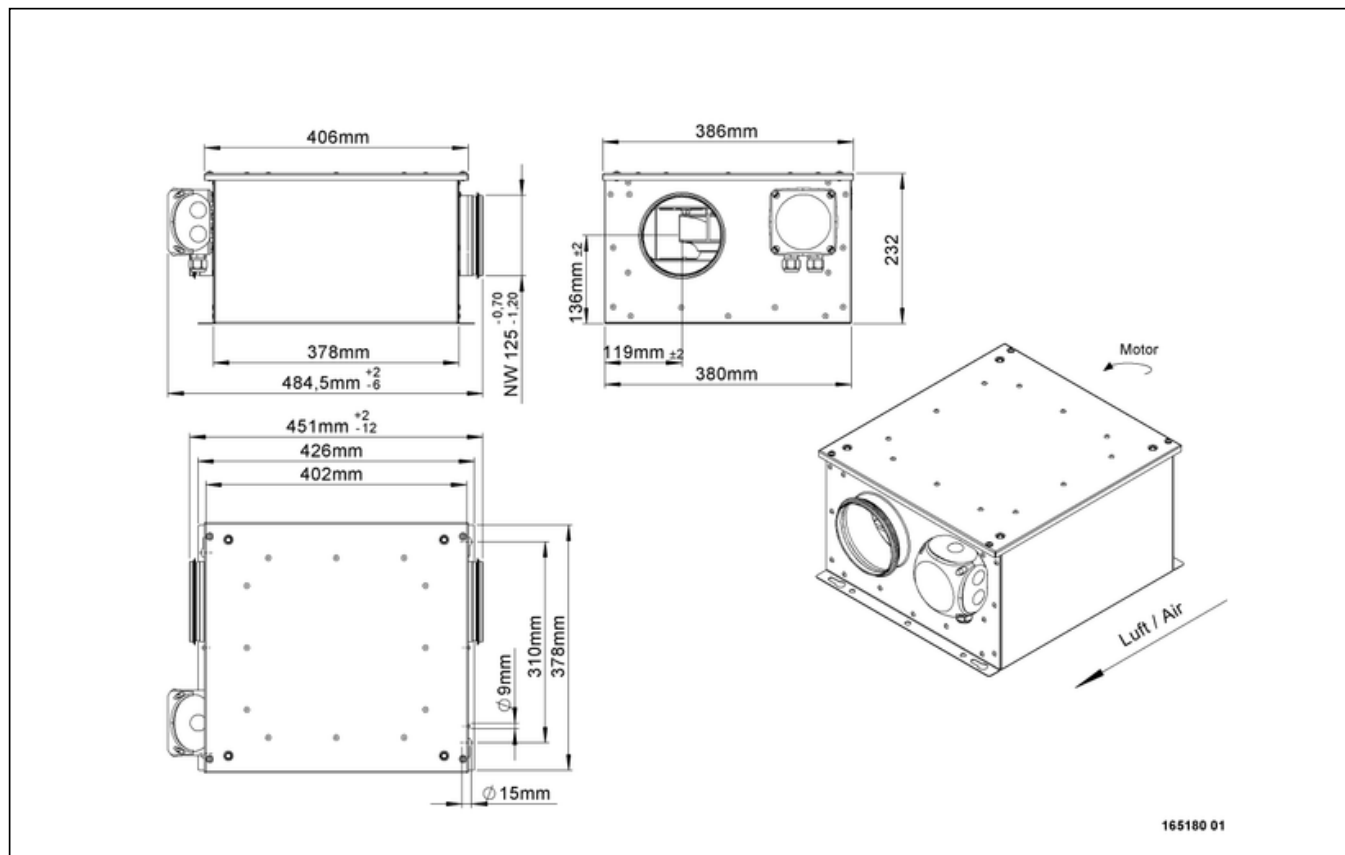






ISOR 125 EC K 01

165180

ruck

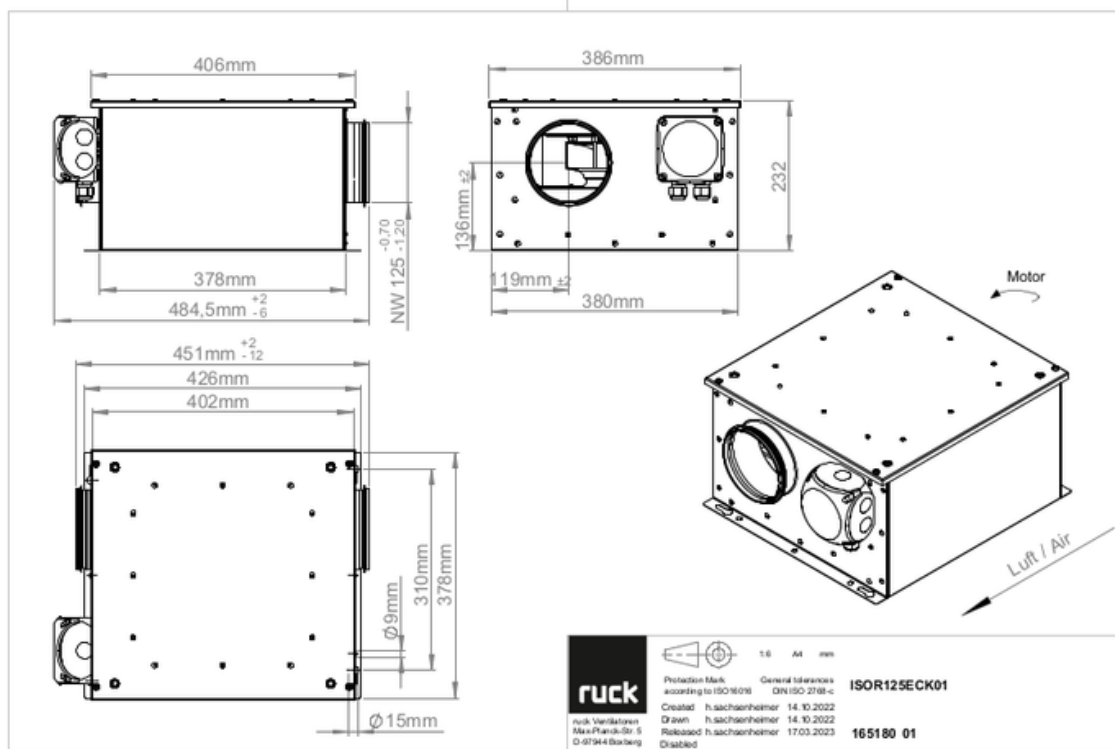

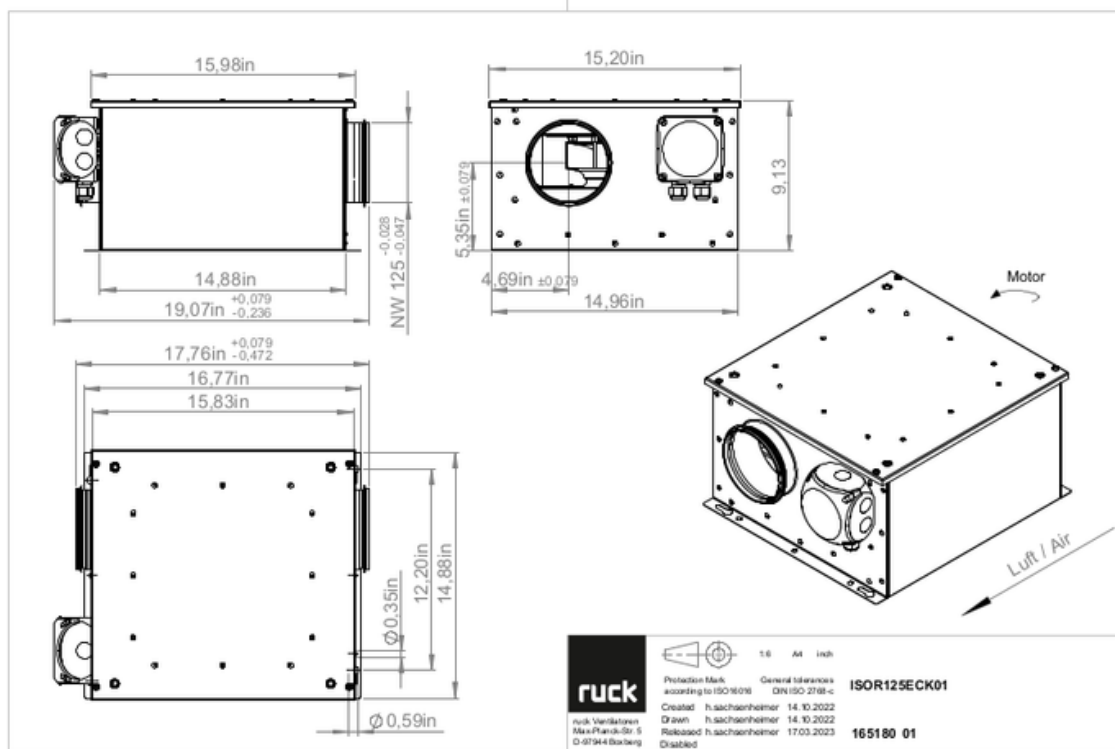

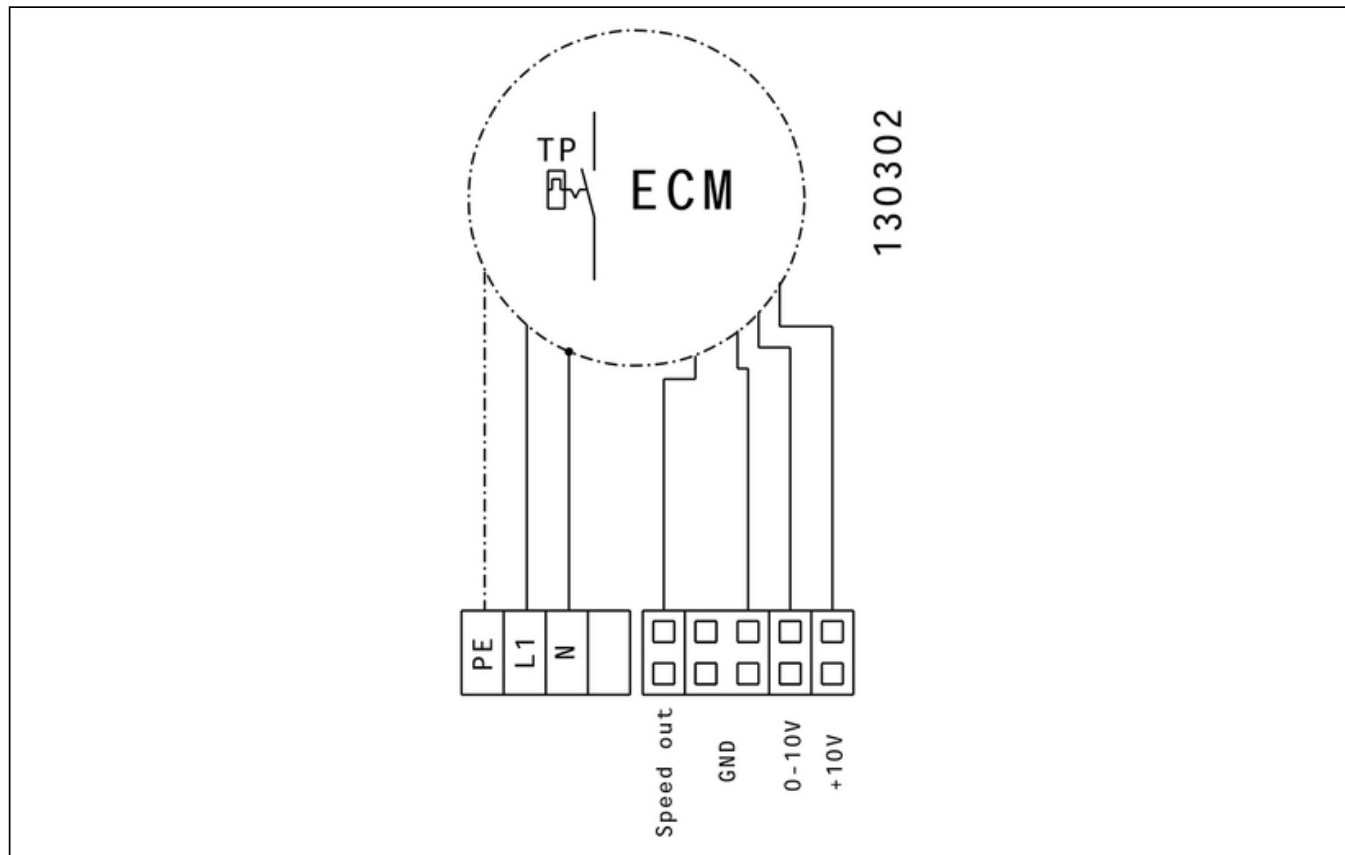

MECHANICAL ACCESSORIES

RSK 125 | 102179



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

VM 125 | 102647



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

SDF 125 | 102700




- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

SDS 125 | 102712




- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SG 125 01 | 102895



- Protection grille for tube connection
- Galvanized wire

FV 125 | 112679



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 125 | 112843



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 125 | 112850



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 125D | 113483



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm 10 \%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page