

OFFER | project data

An:

Nicotra Gebhardt Ltd
Nicotra Gebhardt Ltd
Parkgate Business Park

Von:

Nicotra Gebhardt Ltd
Matthew Riggall
Parkgate Business Park

Phone:

Fax:

Mail: Matthew.Riggall@regalrexnord.com

Phone:

Fax:

Mail: Matthew.Riggall@regalrexnord.com

Projekt:

Acc. to your enquiry

Customer's offer no.:

We have selected the following items:

Item of quotation: 10**Specification of: DDMP 10/8 M6A2 DA5 230V-1F****High performance centrifugal fan DDMP**


Double width, double inlet (DWDI), direct drive, forward curved blades fan. Lap-jointed scroll made of galvanized steel (EN 10142), assembled through a high-technology roller-locked seaming. Straight cut off plate at fan discharge. Impeller with forward curved blades of galvanized steel plate, directly mounted on a brushless, permanent magnets, external rotor motor, without transmission losses, dynamically balanced according to DIN ISO 21940-11. The driver is a separate unit, connected to the fan motor, to power supply and to the control system with quick-connection plugs, ready for operation, without further configuration. Driver directly installed on the scroll, and factory-configured, for a plug and play solution: no further configuration is needed. Continuous speed control of the Drive System by 0 ... 10 V analogue signal, or with Modbus RS485-compliant interface. The complete drive system is in protection class IP 54. Power supply 230V – 50/60 Hz. Air performance ratings according to AMCA 210-07 (Fig. 12) and ISO 5801 (Fig. 69 c and par. 30.2 f).

Technical data of the fan: DDMP 10/8 M6A2 DA5 230V-1F


fulfills the ErP requirements 2015

Description	Value	Dimension
Specified duty point		
Actual duty point		
Installation acc. DIN 24163 Part 1		B
Reference density (ρ_{ref})	1.20	kg/m ³
Medium temperature (t)	20	C
Fan weight	13	kg
<small>This duty point can only be reached by using an inverter/controller for motor speed control!</small>		
Rated data		
Phases-Voltage-Frequency	1~230-50/60	V-Hz
Rated motor current (I_N)	N/A	A
operational limits		
Max. absorbed power (P_{1max})	1.036	kW
Temperature range of conveying medium ($t_{min} \dots t_{max}$)	-20...40	C
ErP-Data at best efficiency and density - kg/m³		
measurement- / efficiency category	B / total	
design status of VSD	VSD is integrated	
overall efficiency (η_{opt})	58.9	%
achieved efficiency grade (N_{ist})	65.1	
required efficiency grade in 2013 / 2015 (N)	42 / 49	
Air flow rate (V_{opt})	2979	m ³ /h
pressure rise (dp_{opt})	675	Pa
Fan speed (n_{vopt})	1459	min ⁻¹
motor power input (P_{1opt})	0.948	kW
specific ratio (d_{dpopt})	1.007	

Fan curve to DDMP 10/8 M6A2 DA5 230V-1F

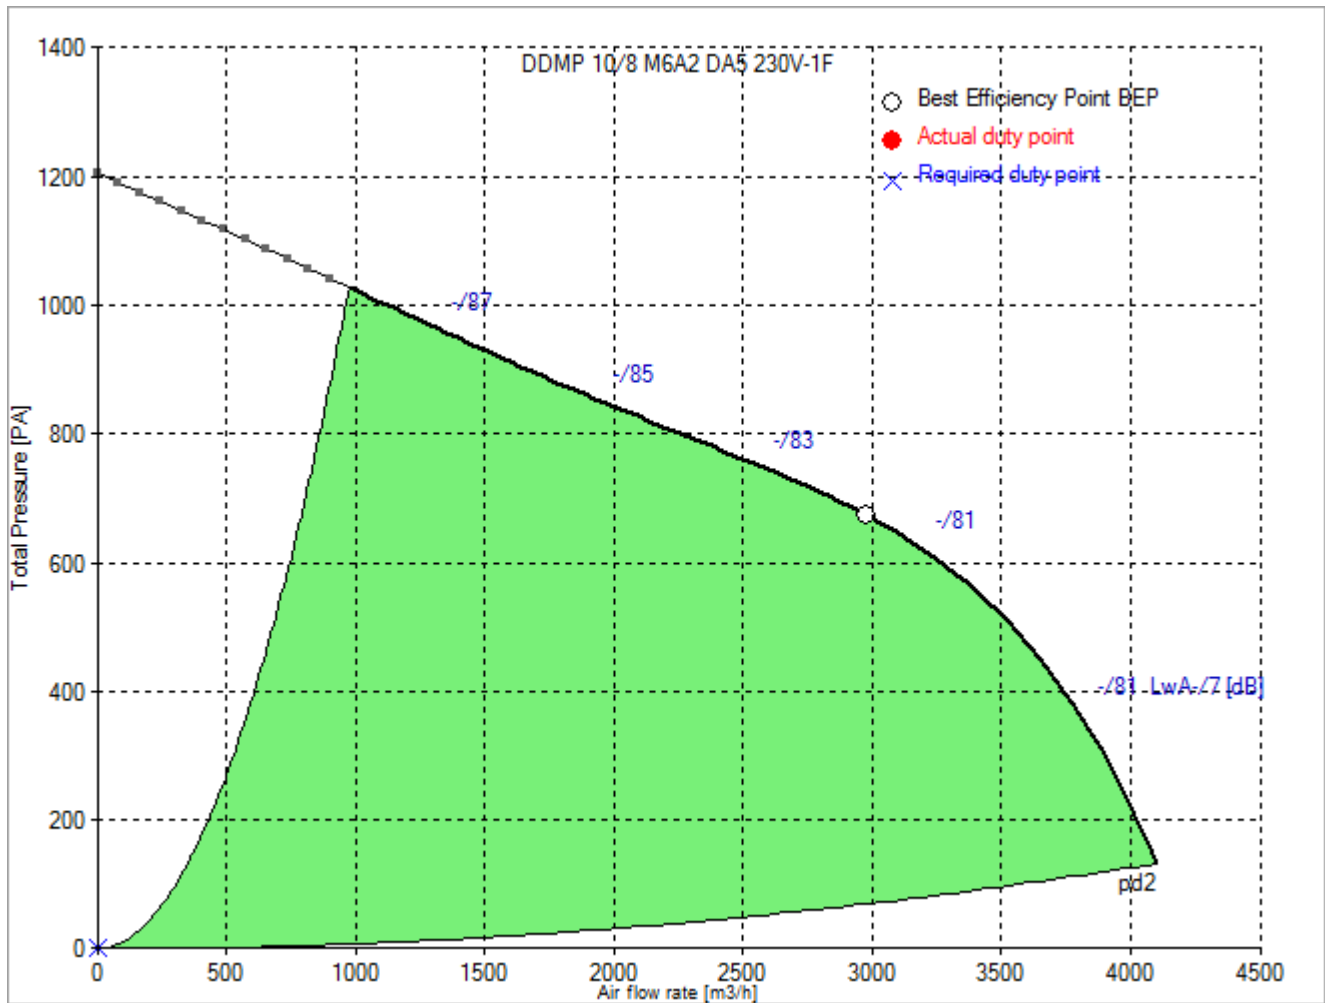


Dimensions to DDMP 10/8 M6A2 DA5 230V-1F

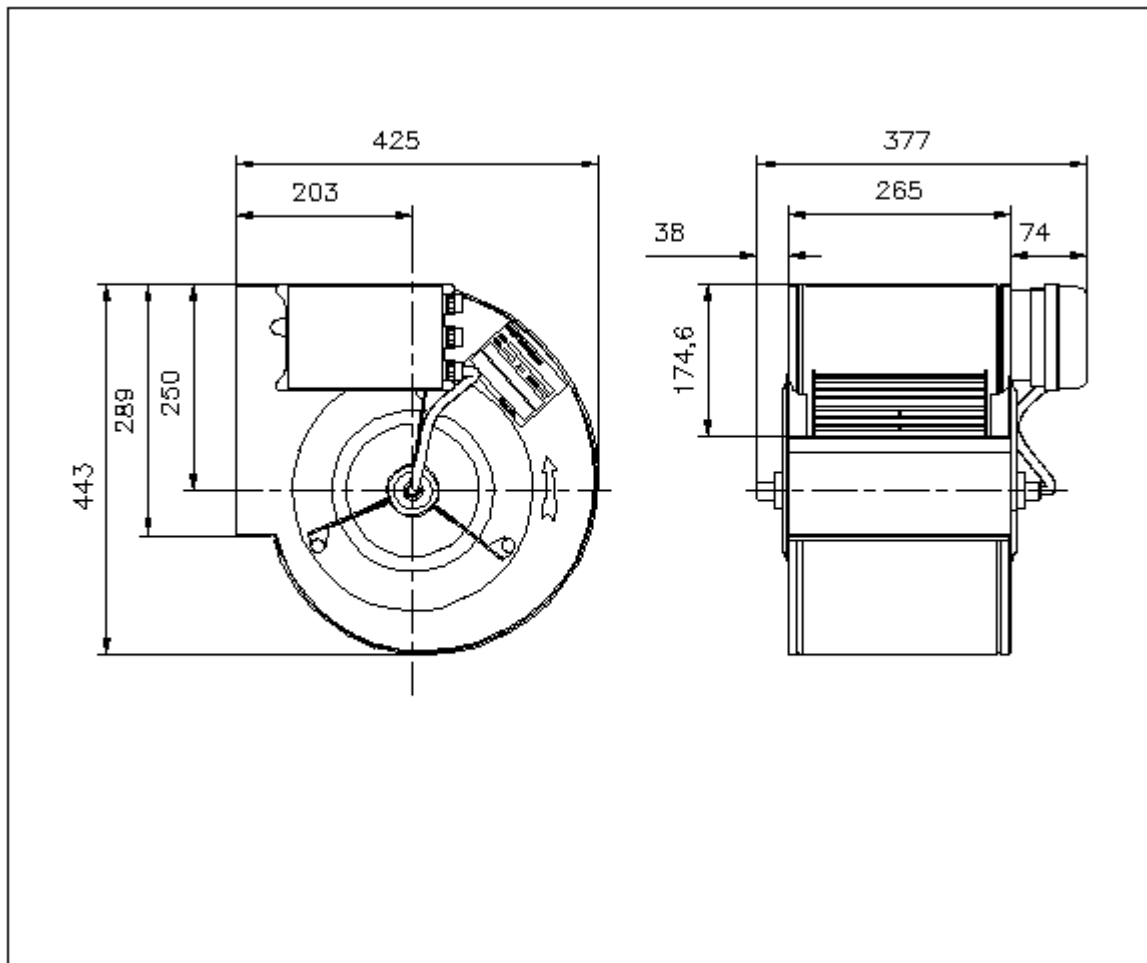

Rotation:
Handing:

RD
90

Wiring diagram of the fan DDMP 10/8 M6A2 DA5 230V-1F

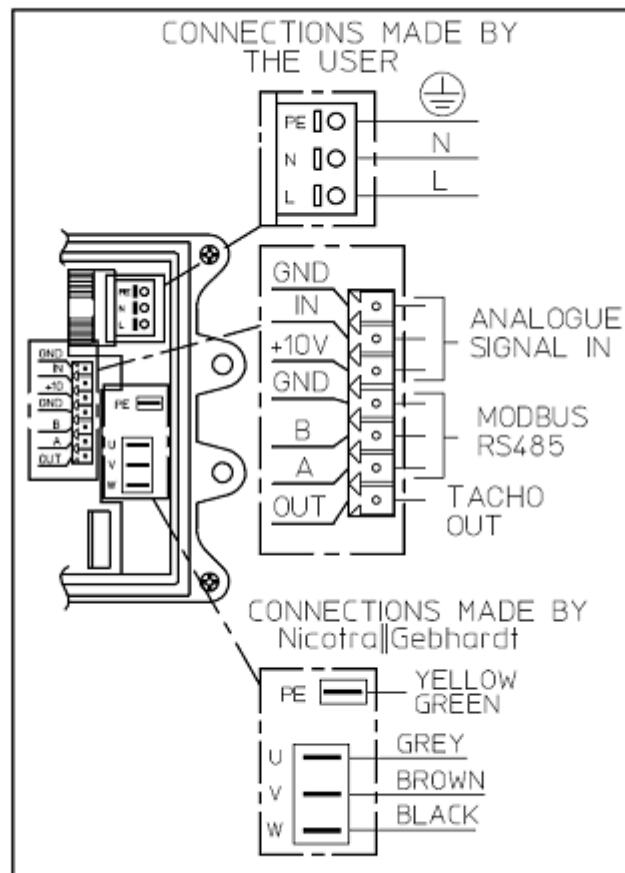

DDMP 1KW

28-11-2017 7W

Wiring diagram for connection to: [mains - VSD - motor](#)
Rotation: [LG](#)