



SIL AX Duct connected silencers

[Find more details in our online catalogue](#)

FSAF710B1DA Silencer 770/16

Circular attenuator suitable for direct connection to cased axial fans

Construction comprises galvanised steel outer casing, end rings fitted with tapped inserts to suit the relevant fan drilling detail. Inner bore is manufactured from perforated galvanised steel spiral tube retaining a 45 kg /m³ density acoustic media with a surface particulate membrane.

Technical parameters

Dimensions and weights


Weight	32 kg
--------	-------

Acoustic

Frequency Hz	63	125	250	500	1K	2K	4K	8K
Insertion Loss dBW	4	8	12	17	17	14	15	16

N.B. Above figures only apply when silencer is bolted direct to the fan flange.

Dimension

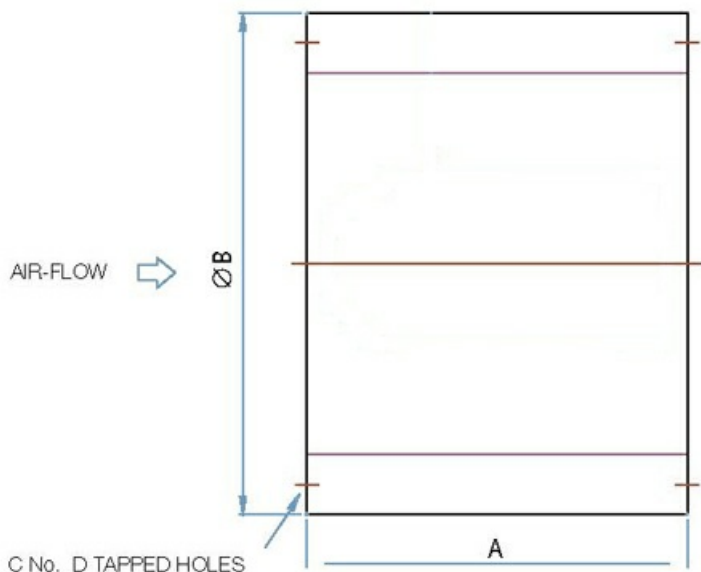

A	B	C	D	E	Weight kg
710	860	16	M10	770	32

