




Tecfire Intumescent Fire Dampers



- Up to one hour fire resistance.
- Slimline construction - only 40mm thick.
- Free area in excess of 50%.
- Low maintenance - no moving parts.
- Circular and rectangular units available.
- Short delivery lead times.

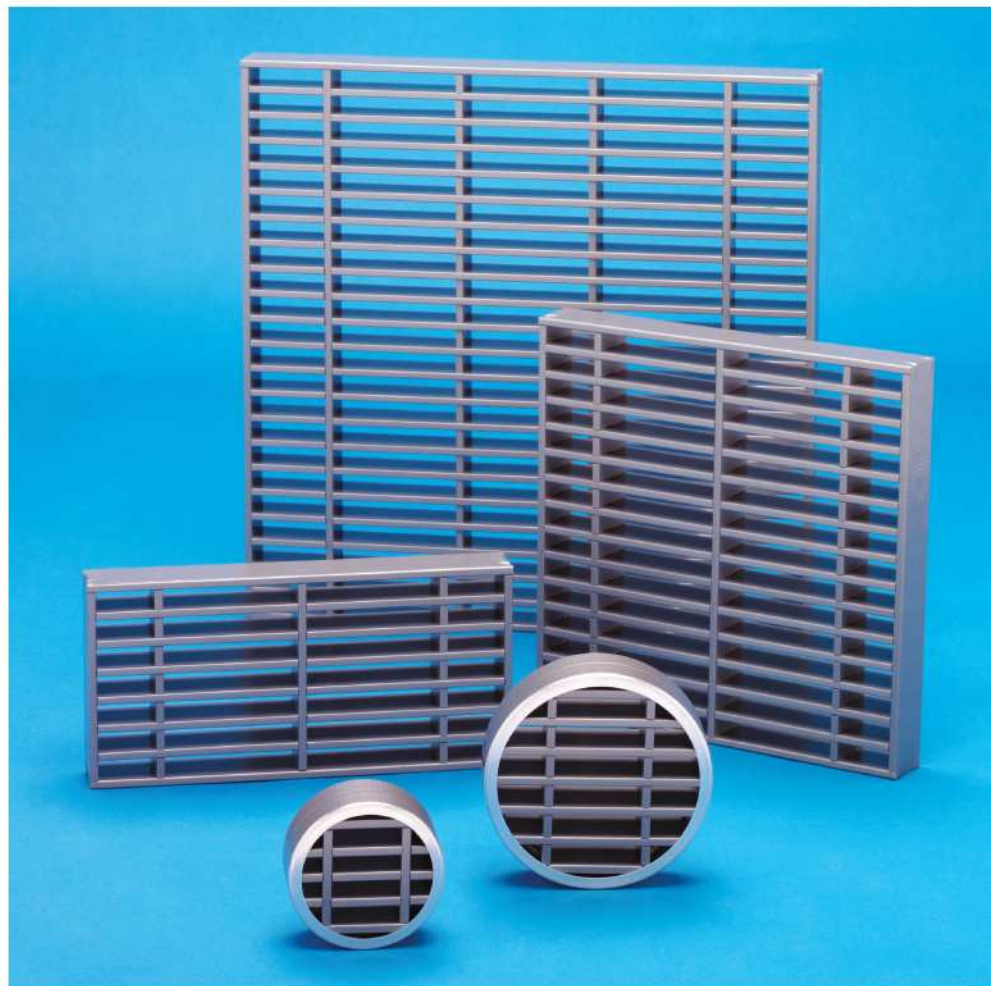

Introduction

Tecfire intumescent dampers (air transfer grilles) have been designed and are manufactured to prevent the spread of fire through ducts or apertures in fire resisting elements such as partitions and doors.



Advantages

- Up to one hour fire resistance
- Free area approx 60%
- Slimline construction - 40mm thick
- Low maintenance - no moving parts
- Circular and rectangular units available
- Bi-directional air flow

Description

Tecfire dampers are produced from PVC slats filled with a high performance intumescent material which are assembled to form a matrix. In the event of a fire the slats and framing components swell to many times their original thickness, fusing together to form a non combustible mass which prevents the passage of hot smoke and gases.

Tecfire dampers have been tested and assessed by the Warrington Fire Research Centre and maintained their integrity for a minimum of 60 Mins.

A copy of the Warrington Fire Research Centre's report, No: 135318, is available free on request.

Note: Tecfire dampers are not suitable for applications where high levels of humidity or wetness are anticipated for these applications please refer to your local branch for alternative products.

Tecfire dampers should not be used in hot air ducts where the air temperature exceeds 70°C.

Construction

Tecfire dampers consist of a sodium silicate intumescent material encapsulated within 40mm x 6mm PVC extrusions which are assembled to form a matrix, mortised jointing of the damper slats to the intumescent outer components eliminates any need for any metal componentry. (Circular units have a pair of outer aluminium rings). Each damper is manufactured 2mm less than the corresponding duct or aperture size to provide clearance during installation.

Tecfire dampers are available up to a maximum size of 600mm x 600mm in 25mm increments.

Installation

Ducts - Tecfire dampers should be secured within ducting using not less than 4 self tapping screws (on circular units two self tapping screws must be used to fix each aluminium ring).

Doors and Partitions - Ensure that cutting an aperture in the door will not detract from the fire integrity of the door. Contact the manufacturer to establish maximum size and optimum position. Cut the aperture to the required size with a gap all around of 3mm. Apply intumescent mastic to the inside faces of the aperture. Fit the damper into the aperture and ensure that it is positioned equidistant from each face and parallel to both faces of the door. Fit retaining 25mm wood screws through the pre-drilled holes in damper outer uprights into door. Clean off surplus mastic and ensure outer edge of damper is fully sealed. Position pressed steel cover grilles centrally over both faces of the damper and fix with 25mm wood screws.

Maintenance

Tecfire dampers contain no moving parts and require little or no maintenance. Units may be dusted or cleaned using a vacuum cleaner or brush.

Options

We offer a comprehensive range of steel return air grilles with a white stove enamelled finish or aluminium grilles in a variety of styles and finishes including non-vision grilles.

Intumescent sealant for gap sealing between ducts and dampers is available ex stock.

LINDAB Ltd

E-mail: sales@lindab.co.uk Internet: www.lindab.co.uk

North London	020 8805 3656	Cardiff	02920 794503	Leeds	0113 297 1111	Sheffield	0114 244 5444
South London	020 8603 0850	Exeter	01626 835032	Leicester	0116 255 6044	Southampton	023 8026 2111
Basildon	01268 532016	Gateshead	0191 482 5995	Lincoln	01522 567087	Stoke-on-Trent	01782 383460
Belfast	02890 781607	Glasgow	0141 419 3800	Manchester	0161 876 0688		
Birmingham	0121 552 6100	High Wycombe	01494 463490	Norwich	01603 747532		
Bristol	0117 977 1345	Kent	01474 579800	Nottingham	0115 985 1923		

Every effort is made to ensure that the information contained in Lindab literature, drawings and correspondence is accurate, but no warranty is given in this respect and the Company shall not be liable as a result of any inaccuracy. The Company reserve the right to alter at anytime, without prior notice, the design, specification, packaging or price of any article and without incurring any obligation.