


ROUND CEILING DIFFUSER



- All aluminium construction
- Designed for any application requiring a high performance diffusion
- Standard colour RAL 9010

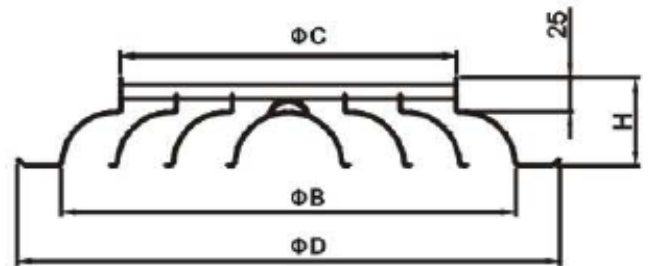

Round Ceiling Diffuser					
ITEM #	SIZE mm	Neck (C)	Face (D)	(B)	Height (H)
238150	150	148	300	230	65
238200	200	198	350	280	65
238250	250	248	400	335	65
238300	300	299	450	380	65
238350	350	348	500	425	65
238400	400	398	560	495	65



POLYAIRE UK
Units 3 & 4, Torridge Close,
Telford Way Business Park,
Kettering, Northants,
ENGLAND, NN16 8PY
Telephone: 01536 519922
sales@polyaire.co.uk

polyaire UK
AIRCONDITIONING PRODUCTS
www.polyaire.co.uk

Selection Table

Throws are based on diffusers mounted in a flat clear ceiling and Isothermal discharge to 0.25 m/s terminal velocity.

Neck Size	Air l/s	Throw m.	NR	Pressure PA	Neck Velocity
150	20	0.4	-	2	1.13
	30	0.7	-	4	1.70
	40	1.1	12	10	2.25
	50	1.4	25	16	2.80
	60	1.9	378	18	3.40
200	40	0.8	-	3	1.27
	50	1.0	12	5	1.60
	60	1.4	21	8	1.90
	70	1.7	30	12	2.20
	80	2.0	36	15	2.55
250	50	0.8	-	2	1.02
	60	1.0	15	4	1.22
	75	1.3	24	6	1.53
	85	1.5	28	8	1.73
	100	1.8	33	12	2.04
300	80	0.8	-	2	1.13
	95	1.1	12	4	1.34
	110	1.3	24	7	1.55
	130	1.6	29	9	1.84
	150	2.0	34	12	2.12
400	125	1.2	-	2	1.0
	150	1.5	10	3	1.2
	175	1.8	14	5	1.4
	200	2.0	25	7	1.6
	225	2.2	29	9	1.8
	250	2.6	34	11	2.0

POLYAIRE UK
 Units 3 & 4, Torridge Close,
 Telford Way Business Park,
 Kettering, Northants,
 ENGLAND, NN16 8PY
 Telephone: 01536 519922
sales@polyaire.co.uk



www.polyaire.co.uk